

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C11D 17/00, 17/06	A1	(11) International Publication Number: WO 00/18870 (43) International Publication Date: 6 April 2000 (06.04.00)
(21) International Application Number: PCT/US98/21022 (22) International Filing Date: 5 October 1998 (05.10.98) (30) Priority Data: PCT/US98/20222 25 September 1998 (25.09.98) US PCT/US98/20221 25 September 1998 (25.09.98) US PCT/US98/20220 25 September 1998 (25.09.98) US (71) Applicant (for all designated States except US): THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): NORWOOD, Kevin, Todd [US/US]; 311 Hilltop Lane, Cincinnati, OH 45217 (US). PANCHERI, Eugene, Joseph [US/US]; 7420 Thumbelina Lane, Montgomery, OH 45242 (US). (74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217-1087 (US).		(81) Designated States: AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>
(54) Title: DETERGENT COMPOSITIONS (57) Abstract Solid detergent compositions comprising from 8 – 60 wt.% of a surfactant system and having a Grand Compatibility Index of at least 0.5, preferably at least 0.6, are claimed. The use of these detergent compositions in a washing process for soiled laundry is also claimed.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Detergent compositions

5 Technical Field

The invention relates to detergent compositions in particular, to laundry detergent compositions.

Background

- 10 All detergents for laundry applications contain surfactants and builders. Generally, most detergents comprise a base powder, made by spray-drying or by granulation of builder components and surfactant components for example, by agglomeration or extrusion. The base powder is often further treated with post-treatment steps such as dry-adding additional particulate detergent components, spray-on of further liquid components such as
- 15 surfactants, particularly non-ionic surfactants and/or post-dusting steps using finely particulate solid materials to reduce caking and stickiness of the solid detergents produced.

- Environmental pressures have led to the need to produce detergents which are as efficient as possible. The trend to use lower amounts of more highly compact detergent
- 20 compositions, for example having a density above 600g/l or 650g/l or above 700g/l or even higher, has emphasised the need to ensure full performance of all of the detergent components in the wash.

- However, solid detergents tend to form lumps or gel upon contact with water. Lumps of
- 25 gelled material may then fall into the sump of a washing machine where they are not disturbed mechanically, or because of their method of use in a machine, solid detergents do not dissolve, poor delivery of the product from a dispensing drawer of a washing machine or from a dispensing device and/or once in the machine itself, results. Poor use of all of the detergent components is therefore achieved. generally preferred that the compositions
- 30 are free of phosphate-containing builder material.

The inventors have undertaken detailed studies of these properties of detergents and have found that the factors influencing these properties are numerous and inter-related in a complex way: inorganic compounds in a detergent formulation can affect the phase chemistry of surfactants via their contribution to the ionic strength of the solution; certain surfactant phases can trap inorganic species in a phase that is conducive to hydrate formation; certain inorganic hydrates, once formed, can interlock with each other and produce a tough framework that is persistent and provides micro-regions that are conducive to surfactant phase formation. Further complicating this situation is the fact that many of the inorganic hydrates and surfactant phases are affected by the concentration of the detergent in water by the hardness of the water and by the temperature of the water. Thus nothing is known in the art that quantitatively describes this complex situation and leads to a solution for providing detergent compositions which will avoid such problems. The inventors have now surprisingly found that a thorough understanding of these complex inter-related factors has enabled them to provide detergent compositions avoiding the problems discussed above. Novel detergent compositions are therefore provided which have a specified Grand Compatibility Index.

Thus, novel detergent compositions result which provide good washing performance with minimum amounts of detergent and good detergent delivery into the wash are achieved and fabric damage due to high localised bleach concentrations is minimised.

Summary of the invention

In accordance with the present invention there is provided a solid detergent composition comprising from 8-60 wt % of a surfactant system and having a minimum Grand Compatibility Index of 0.5, preferably 0.6, more preferably 0.7 or even 0.8 or 0.9.

The Grand Compatibility Index is a function of a Compatibility Index and a Secondary Compatibility Index.

The Compatibility Index can be determined in the following way:

- 1 litre of de-ionised water is placed in a tergitometer (Erweka DT6-R hereinafter referred to as the 'Sotax' apparatus) (USP 711 dissolution standard). Adjust the hardness to
- 5 100ppm equivalent of CaCO_3 using a convenient soluble form of calcium, such as calcium chloride. The Sotax is fitted with a perspex lid to prevent evaporation, it is calibrated to a temperature of 5°C with the stirrer (paddle) set to 200rpm. The paddle has two blades fixed at the central axis directly opposite one another so that overall the two blades provide the paddle with a diameter of 75mm. The paddle is positioned in the centre of the
- 10 Sotax apparatus with a distance between the bottom of the paddle and the bottom of the tergitometer of 25mm. The overall height of the paddle blades is 19mm. A wire basket is provided having side walls and base formed from 20 mesh (850μ) stainless steel wire, a diameter of 25mm and a height of 41mm. The wire basket is filled with a detergent product, the surface of the detergent product is levelled off and a non-permeable lid is used
- 15 to close off the top of the wire basket. The quantity of sample is gravimetrically determined by weight difference. The wire basket is then suspended in a stationary position midway between the central axis of the Sotax and the side wall, at a height such that the base of the wire basket is 7mm above the upper surface of the paddle.
- 20 After twelve minutes the wire basket assembly is removed from the Sotax apparatus and the residue is transferred to a sealed container

- Analyze the residue in the sealed container in its entirety for the number of moles of the hydrated and anhydrous forms of any carbonate, sulfate, borate, and phosphate salts. This
- 25 is accomplished by using any of the standard techniques known to those skilled in the art of detergent analysis. It will be appreciated that this analysis is to be conducted immediately so that the salts will not change their hydration states prior to the analysis.

- The water remaining in the Sotex apparatus is also analyzed in its entirety. First it is
- 30 filtered through a 0.45 micron filter and analyzed for the number of moles of carbonate, sulfate, borate, and phosphate ions. It will be appreciated that this filtration should be

accomplished immediately to avoid formation of insoluble salts from the soluble salts in the solution. The filtered solution should be analyzed for the number of moles of any carbonate, sulfate, borate, and phosphate ions that are in solution. All carbonate, sulfate, borate, and phosphate salts that may have precipitated from the solution after the filtration
 5 are also analyzed and are added to the numbers that were found to be in solution.

The Compatibility Index is calculated according to the following formula:

$$\text{Residue Index} = (I_i + I_{<8h} + O_o * (I_o - I_{>8h}) / I_o) / (I_o + O_o)$$

10

where:

I_i = number of moles of the above mentioned inorganics (carbonate, sulfate, borate and phosphate) ions determined in the aqueous solution;

$I_{<8h}$ = number of moles of the above mentioned inorganic hydrate salts containing less than
 15 8 moles of water of hydration per mole determined in the wire basket residue;

$I_{>8h}$ = number of moles of the above mentioned inorganic hydrate salts containing more than 8 moles of water of hydration per mole determined in the wire basket residue;

I_o = number of moles of the above mentioned inorganic salts that were placed in the wire basket at the start of the experiment;

20 O_o = number of moles of anionic, nonionic, cationic and semipolar surfactants (as described below) that were placed in the wire basket at the start of the experiment.

The Secondary Compatibility Index is determined in the following way:

25 Using the same apparatus, 800ml of de-ionised water is charged to the Sotax apparatus and the temperature is allowed to equilibrate to 20 °C with a stirrer speed of 200rpm. Adjust the hardness to 100ppm equivalent of CaCO_3 using a convenient and a soluble form of calcium such as calcium chloride. 2 grammes of product is then added to the water and stirred at a stirrer speed of 200rpm for 20 minutes. After 20 minutes, the water
 30 containing the detergent sample is filtered through a 0.45 micron filter. The solids collected on the filter are analyzed using the same procedure as described above in the

Compatibility Index determination except that the sample is maintained at 20°C rather than 5°C. Similarly the aqueous solution is analyzed using the same procedure as described above in the Compatibility Index determination.

- 5 The Secondary Compatibility Index is calculated according to the following formula:

$$\text{Secondary Residue Index} = (I_s + I_{<1/2h} + O_o * (I_o - I_{>1/2h}) / I_o) / (I_o + O_o)$$

where:

- 10 I_s = total number of moles of the above mentioned inorganics (carbonate, borate, sulphate and phosphate) ions determined in the aqueous solution;
 $I_{<1/2h}$ = number of moles of the above mentioned inorganic hydrate salts containing less than 1/2 moles of water of hydration per mole determined in the filter cake;
 $I_{>1/2h}$ = number of moles of the above mentioned inorganic hydrate salts containing more
 15 than 1/2 moles of water of hydration per mole determined in the filter cake;
 I_o = number of moles of the above mentioned inorganic salts that were placed in the Sotax at the start of the experiment;
 O_o = number of moles of anionic, nonionic, cationic and semipolar surfactants (as described in pages 13 through 25) that were placed in the Sotax at the start of the
 20 experiment.

Using the Compatibility Index and the Secondary Compatibility Index calculated above the Grand Compatibility Index is defined as follows:

- 25 Grand Compatibility Index = Compatibility Index * Secondary Compatibility Index

The novel detergent formulations according to the invention have a surfactant system and an inorganic system that are well matched and compatible, these yield Grand Compatibility Indices of at least 0.5, preferably at least 0.6, more preferably at least 0.7 or even at least
 30 0.8 or at least 0.9.

The detergent compositions of the invention preferably comprise no more than 3 wt% inorganic phosphate salts, more preferably no more than 1 wt % phosphate salts and most preferably no more than 0.5 wt% phosphate salts. Preferably the compositions of the invention comprise no more than 5 wt% inorganic borate salts, more preferably no more than 2 wt% inorganic borate salts and most preferably no more than 0.5 wt% inorganic borate salts. Preferably the detergent compositions of the invention contain less than 10 wt% inorganic chloride salts, more preferably less than 5 wt%, or even less than 2 wt% or 0.5 wt% inorganic chloride salts. Preferred compositions comprise at least 5 wt% sodium or potassium carbonate, bicarbonate or sesquicarbonate or mixtures thereof. Sesquicarbonate and/or bicarbonate are preferably present in amounts of at least 5 wt%, most preferably at least 10 wt% in the composition.

Builder System

The detergent compositions comprise a builder system which may be provided by one or mixtures of more than one builder. Water soluble and/or water insoluble builders may be used. The builder system generally comprises from 1 to 90 wt % of the detergent composition, preferably from 20 to 80 wt % of the composition.

20

Water-Soluble or Partially Water-Soluble Builders

The builder system in the compositions according to the invention preferably contains a water-soluble and/or partially water-soluble builder compound, typically present at a level of from 1% to 80% by weight, preferably in amounts up to 50 wt %, or up to 40% or even 35%. Preferably water-soluble builders are present in amounts from at least 3% or 8%, but they are preferably present in amounts from 6 to 25 wt%.

The detergent compositions of the invention may comprise phosphate-containing builder material, such as tetrasodium pyrophosphate or more preferably anhydrous sodium tripolyphosphate. Phosphate builders may be present at a level of from 0.5% to 60%, or from 5% to 50%, or even from 8% to 40% by weight. However, it is

Crystalline layered silicates are also suitable partially water-soluble builders. The preferred crystalline layered silicate herein has the general formula



wherein M is sodium or hydrogen, x is a number from 1.9 to 4 and y is a number from 0 to 20. Crystalline layered sodium silicates of this type are disclosed in EP-A-0164514 and methods for their preparation are disclosed in DE-A-3417649 and DE-A-3742043. For
10 the purpose of the present invention, x in the general formula above has a value of 2, 3 or 4 and is preferably 2. M is preferably H, K or Na or mixtures thereof, preferably Na. The most preferred material is α - $\text{Na}_2\text{Si}_2\text{O}_5$, β - $\text{Na}_2\text{Si}_2\text{O}_5$ or δ - $\text{Na}_2\text{Si}_2\text{O}_5$, or mixtures thereof, preferably being at least 75% $\text{-Na}_2\text{Si}_2\text{O}_5$, for example available from Clariant as NaSKS-6. The crystalline layered silicate material, in particular of the formula $\text{Na}_2\text{Si}_2\text{O}_5$
15 may optionally comprise other elements such as B, P, S, for example obtained by processes as described in EP 578986-B.

Partially water-soluble builder is preferably present at a level up to 40%, more preferably up to 35%. When present it may be preferred that the composition of the invention
20 comprises from 10% to 40%, more preferably from 12% to 35% or even from 15% to 25% by weight of the composition of the partially water-soluble builder.

The water soluble builders include organic carboxylic acids and salts thereof. Suitable water-soluble builder compounds include the water soluble monomeric polycarboxylates,
25 or their acid forms, homo or copolymeric polycarboxylic acids or their salts in which the polycarboxylic acid comprises at least two carboxylic radicals separated from each other by not more than two carbon atoms and mixtures of any of the foregoing.

The carboxylate or polycarboxylate builder can be monomeric or oligomeric in type
30 although monomeric polycarboxylates are generally preferred for reasons of cost and

performance. In addition to these water-soluble builders, polymeric polycarboxylates may be present, including homo and copolymers of maleic acid and acrylic acid and their salts.

Suitable carboxylates containing one carboxy group include the water soluble salts of lactic acid, glycolic acid and ether derivatives thereof. Polycarboxylates containing two carboxy groups include the water-soluble salts of succinic acid, malonic acid, (ethylenedioxy) diacetic acid, maleic acid, diglycolic acid, tartaric acid, tartronic acid, malic and fumaric acid, as well as the ether carboxylates and the sulfinyl carboxylates. Polycarboxylates containing three carboxy groups include, in particular, water-soluble citrates, aconitrates and citraconates as well as succinate derivatives such as the carboxymethyloxysuccinates described in British Patent No. 1,379,241, lactoxysuccinates described in British Patent No. 1,389,732, and aminosuccinates described in Netherlands Application 7205873, and the oxypolycarboxylate materials such as 2-oxa-1,1,3-propane tricarboxylates described in British Patent No. 1,387,447.

Polycarboxylates containing four carboxy groups include oxydisuccinates disclosed in British Patent No. 1,261,829, 1,1,2,2-ethane tetracarboxylates, 1,1,3,3-propane tetracarboxylates and 1,1,2,3-propane tetracarboxylates. Polycarboxylates containing sulfo substituents include the sulfosuccinate derivatives disclosed in British Patent Nos. 1,398,421 and 1,398,422 and in U.S. Patent No. 3,936,448, and the sulfonated pyrolysed citrates described in British Patent No. 1,439,000. Preferred polycarboxylates are hydroxycarboxylates containing up to three carboxy groups per molecule, more particularly citrates. The parent acids of the monomeric or oligomeric polycarboxylate chelating agents or mixtures thereof with their salts, e.g. citric acid or citrate/citric acid mixtures, are also contemplated as useful builder components.

Most preferred may be acetic acid, citric acid, malic acid, and fumaric acid, or their salts or mixtures thereof. It may be preferred that mixtures of the salt and acid form are present.

The water soluble builder is preferably present at a level up to 40%, more preferably up to 35%. When present it may be preferred that the composition of the invention comprises

from 10% to 40%, more preferably from 12% to 35% or even from 15% to 25% by weight of the composition of the water-soluble builder.

It may be preferred that the polymeric or oligomeric polycarboxylates are present at levels
5 of less than 5%, preferably less than 3% or even less than 2% or even 0% by weight of the compositions.

Borate builders, as well as builders containing borate-forming materials that can produce borate under detergent storage or wash conditions are useful water-soluble builders herein.

10

Other suitable water-soluble builder materials are polymeric polycarboxylic acids or polycarboxylates, including the water soluble homo- or co-polymeric polycarboxylic acids or their salts in which the polycarboxylic acid comprises at least two carboxyl radicals separated from each other by not more than two carbon atoms. Polymers of the latter type
15 are disclosed in GB-A-1,596,756. Examples of such salts are polyacrylates of MWt 1000-50000, preferably 10000 or even 7000 and copolymers of (poly)acrylate and maleic acid or anhydride, such copolymers having preferably a molecular weight of from 2000 to 100,000, especially 40,000 to 80,000.

20 In a preferred embodiment of the invention, the water-soluble or partially insoluble builder, and in particular, crystalline layered silicate when present, is at least partially, for example at least 50 wt % present, in an intimate mixture with a surfactant, preferably an anionic surfactant.

25 It has also been found that when the highly water-soluble carboxylate- or carboxylic acid-containing compounds are present in an intimate mixture with one or more of the surfactants and optionally other ingredients, the rate of dissolution of the intimate mixture and also of the surfactants and other ingredients is increased. Thus, overall a faster delivery of the surfactants and other ingredients can be achieved.

30

Thus, a preferred particulate component in the detergent compositions of the invention herein may comprise an intimate mixture of preferably from 25% to 75% by weight, more preferably from 35% to 68%, even more preferably from 45% to 62% by weight of the component of a of a crystalline layered silicate or water-soluble builder and from 25% to
5 75% by weight, more preferably from 32% to 62% by weight more preferably from 38% to 48% by weight of the component of an anionic surfactant.

Such a particulate component preferably comprises less than 10% by weight of free moisture, preferably less than 5%, or even less than 3% or even less than 2% by weight.
10 The free moisture content as used herein, can be determined by placing 5 grams of the particulate component in a petri dish and placing this petri dish in a convection oven at 50°C for 2 hours, and subsequently measuring the weight loss, due to water evaporation

The anionic surfactant preferably comprises from 50% to 100% by weight, preferably from
15 60% or even 75% to 100% of the anionic surfactant of a sulphonate surfactant preferably an alkyl benzene sulphonate surfactant, as described below. As much as 50 % by weight or more based on the total amount of anionic surfactant in the detergent composition is preferably incorporated into such a particulate component.

20 Preferably such a particulate component is present in the detergent composition in amounts of from 0.5 to 60 wt %, preferably from 3% to 50%, more preferably from 5% to 45%, even more preferably at a level of at least 7% by weight of the composition.

Preferably, the weight ratio of the crystalline layered silicate and/or one or more water-
25 soluble builders to the anionic surfactant in the intimate mixture is from 4:5 to 7:3, more preferably from 1:1 to 2:1, most preferably from 5:4 to 3:2.

Such a component may also comprise additional ingredients, for example in amounts of from 0% to 25%, generally no greater than 20% or even 15% by weight of the particulate
30 component. The precise nature of these additional ingredients, and levels of incorporation thereof will depend on the application of the component or compositions and the physical

form of the components and the compositions. It may be preferred that the particulate composition comprises less than 15% or even less 10% or even 5% by weight of the granulate of non-ionic ethoxylated alcohol surfactant, preferably less than 15%, or even less than 10% or even less than 5% of any non-ionic surfactant.

5

It may be preferred that the particulate composition comprises less than 10% by weight, preferably less than 5% by weight of an aluminosilicate material. If any aluminosilicate material is present, it may be preferred that the particulate composition is dusted with the aluminosilicate material.

10

The particulate component may comprise polymeric binder material, although it is preferred to use as little binder material as possible. It may be preferred that the intimate mixture comprises less than 25%, preferably less than 10%, more preferably less than 5% by weight, most preferably 0% by weight of ethylene oxide polymers.

15

The particulate component preferably has a weight average particle size of at least 50 microns, preferably from 150 microns to 1500 microns, or more preferably 80% by weight of the particles has an particle size of more than 300 microns (80% by weight on Tyler sieve mesh 48) and less than 10% by weight of the particles has a particle size of more than 1180 microns or even 710 microns (on Tyler mesh sieve24).

20

Preferably, the density of the particulate component is from 380g/litre to 1500gr/litre, or more preferably from 500 g/litre to 1200 g/litre, more preferably from 550 g/litre to 900g/litre.

25

The particulate component can be present in the detergent compositions of the invention as a separate particle, or it may be further mixed with other detergent ingredients, including by further agglomeration, compaction, tableting or extrusion.

30

Such an intimate mixture or particulate component may be prepared by any well-known method for forming such detergent particulates e.g. agglomeration, spray-drying, roll

compaction and/or extrusion or combinations of these process steps. Such processes may optionally be followed by a drying step or a dusting step and/or a spray-on step. The granulate produced is then preferably mixed with the other detergent ingredients.

- 5 The crystalline layered silicate and/or highly water-soluble builder may also be in an intimate mixture with other materials, including one or more of the water-soluble builders or polymeric compounds such as acrylic and/ or maleic acid polymers, inorganic acids or salts, including carbonates and sulphates, or small levels of other silicate material, including amorphous silicate, meta silicates, and aluminosilicates, as described herein.

10

- It may be preferred that part or even all of the water-soluble builder, in particular, monomeric or oligomeric (poly)carboxylic acid or salt thereof is in the form of a separate particle, whereby it may be preferred that the average particle size of this builder material is then preferably less than 150 microns, or even less than 100 microns. It may be preferred
- 15 that part of the water-soluble or partially water-soluble builder is used as dusting agent, to reduce the caking of the product when necessary.

- In particular, when small amounts of insoluble builder are present in the compositions a polycarboxylate polymer, such as polymer and copolymer of maleic anhydride or acid and
- 20 (poly)acrylic acid and their salts may be incorporated at a level of from 0.5% to 15%, preferably from 1% to 12% or even from 2% to 8% by weight of the composition. Hereby, it may be preferred that the water-insoluble builder and the polymer are not in an intimate mixture with one another.

- 25 The inventors have also found that when a polymeric polycarboxylate is present, it may be preferred that the polymer is comprised in an intimate mixture with other detergent components, preferably in a spray-dried particle, which is prepared by first mixing a carbonate salt and the polymer and then addition and intimately mixing of other ingredients.

30


Insoluble Builders

The compositions of the invention may contain an insoluble builder compound. Generally these are present in amounts no more than 30 wt% based on the detergent composition as a whole, preferably no greater than 25 wt %.

Examples of largely water insoluble builders include the sodium aluminosilicates.

Suitable aluminosilicate zeolites have the unit cell formula $\text{Na}_x[(\text{AlO}_2)_z(\text{SiO}_2)_y] \cdot x\text{H}_2\text{O}$ wherein z and y are at least 6; the molar ratio of z to y is from 1.0 to 0.5 and x is at least 5, preferably from 7.5 to 276, more preferably from 10 to 264. The aluminosilicate material are in hydrated form and are preferably crystalline, containing from 10% to 28%, more preferably from 18% to 22% water in bound form.

The aluminosilicate zeolites can be naturally occurring materials, but are preferably synthetically derived. Synthetic crystalline aluminosilicate ion exchange materials are available under the designations Zeolite A, Zeolite B, Zeolite P, Zeolite X, Zeolite HS and mixtures thereof. Zeolite A has the formula:



wherein x is from 20 to 30, especially 27. Zeolite X has the formula $\text{Na}_{46}[(\text{AlO}_2)_{86}(\text{SiO}_2)_{106}] \cdot 276 \text{H}_2\text{O}$.

Another preferred aluminosilicate zeolite is zeolite MAP builder. Zeolite MAP is described in EP 384070A (Unilever). It is defined as an alkali metal aluminosilicate of the zeolite P type having a silicon to aluminium ratio not greater than 1.33, preferably within the range from 0.9 to 1.33 and more preferably within the range of from 0.9 to 1.2. Of particular interest is zeolite MAP having a silicon to aluminium ratio not greater than 1.15 and, more particularly, not greater than 1.07.

In a preferred aspect the zeolite MAP detergent builder has a particle size, expressed as a d_{50} value of from 1.0 to 10.0 micrometres, more preferably from 2.0 to 7.0 micrometres, most preferably from 2.5 to 5.0 micrometres. The d_{50} value indicates
5 that 50% by weight of the particles have a diameter smaller than that figure. The particle size may, in particular be determined by conventional analytical techniques such as microscopic determination using a scanning electron microscope or by means of a laser granulometer. Other methods of establishing d_{50} values are disclosed in EP 384070A.

10

Water insoluble-builders, in particular aluminosilicates, have been found to contribute to the problems of poor overall use of components of detergent compositions. Therefore, their incorporation into detergent compositions is generally at low levels, or requires specific processing to enable maximum efficiency of all the detergent ingredients in a
15 detergent composition.

Thus, in one embodiment of the invention, aluminosilicate builder is preferably present in amounts below 9 wt %, preferably below 6 wt % or 4 wt %. It may even be preferred that substantially no water-insoluble builder is present. Preferably a detergent composition will
20 contain low levels of amorphous silicates, for example less than 5 wt % of the composition of amorphous sodium silicate, most preferably less than 2 wt %.

In a preferred aspect the detergent composition preferably comprises a builder system which comprises less than 30% or even less than 20% or even less than 10% by weight of
25 water insoluble builder, whereby in the preferred embodiments the balance of the builder system are the water-soluble builders and/ or partially water soluble builders.

When present, the aluminosilicate may be contained in a component containing other detergent ingredients, such as surfactants for example, in a detergent agglomerate,

extrudate or a blown powder. It may even be preferred that substantially no aluminosilicate is present as a separate (dry-added) particulate ingredient.

Also, preferably less than 3% or even less than 1.5% or even less than 0.8% by weight of
 5 amorphous silicate is present. When present, the amorphous silicate is preferably contained in a component containing other detergent ingredients, such as surfactant for example, in a detergent agglomerate, extrudate or a blown powder. It may be preferred that substantially no amorphous silicate is present as separate particulate ingredient.

10 As described above, detergent compositions of the invention preferably comprise at least one particulate component containing an intimate mixture of one or more of the water soluble or partially water soluble builders and one or more surfactants. Preferably, at least two of such particulate components are present in the detergent composition.

15 In a further embodiment of the invention, if it is desired to incorporate insoluble builder, particularly aluminosilicates in amounts of, for example, 5 wt % or more where the compositions also comprise anionic surfactant for example, in amounts of 5 wt % or more, the detergent composition is preferably such that there are at least two detergent (n) components (i) in the composition and the degree of mixing (M) or the anionic surfactant
 20 and aluminosilicate builder is from 0 to 0.7 where

$$M = \sum_{i=1}^n \sqrt{(\sigma_i \cdot \zeta_i)}$$

and

σ is the fraction of the anionic surfactant of the composition comprised in the component (i);

25 ζ is the fraction of the aluminosilicate of the composition comprised in component (i).

In order to achieve particularly good detergent delivery, it is preferred that M is from 0 to 0.6, or even from 0 to 0.5.

30 In such an embodiment of the invention, the detergent composition herein comprises at least two multi-ingredient (i.e. no more than 95 wt % of a single ingredient in each

component) components which comprise an anionic surfactant or an aluminosilicate or mixtures thereof, whereby if mixtures of aluminosilicate and the surfactant are present in one or more of the components, the degree of mixture M is less than 0.7, as defined by the formula. Thus, each component comprises part or all of the aluminosilicate, all or part of the anionic surfactant or mixtures thereof, provided that M is from 0 to 0.7.

The components together comprise the aluminosilicate builder at a level of least 5% by weight of the composition of and the anionic surfactant at a level of at least 5% by weight of the composition. Preferably, the components comprise the aluminosilicate at a level of at least 7%, or more preferably at least 10% or even 15% by weight of the composition. Depending on the precise formulation of the composition and the conditions of use, the compositions of the invention can even comprise higher levels of aluminosilicate, such as more than 20% or even more than 25%, whilst still providing an improved delivery of the detergent to the wash.

Preferably at least 7% or more preferably at least 10% or even at least 12% by weight of the composition of anionic surfactant is present in the components. Depending on the precise formulation of the composition and the conditions of use, it may be preferred to have levels of anionic surfactants of 18% by weight of the composition or more.

Such components are prepared as described above: by any granulation method such as agglomeration, co-compaction, spray-drying or extrusion.

Effervescence System

Any effervescence system known in the art can be used in the detergent compositions of the invention. A preferred effervescence system for incorporation in the particle of the invention, comprises an acid source, capable of reacting with an alkali source in the presence of water to produce a gas.

Preferably, where the effervescence system comprises two or more reactants, these will be provided in an intimate mixture as an effervescence component. Most preferably, the

effervescence component comprises an intimate mixture of substantially anhydrous stabilising agent with acid and alkaline reactants.

The acid source component may be any organic, mineral or inorganic acid, or a derivative thereof, or a mixture thereof. Preferably the acid source component comprises an organic acid. The acid source is preferably substantially anhydrous or non-hygroscopic and the acid is preferably water-soluble. It may be preferred that the acid source is overdried. Suitable acid source components include citric, malic, maleic, fumaric, aspartic, glutaric, tartaric succinic or adipic acid, monosodium phosphate, boric acid, or derivative thereof.

5 Citric acid, maleic or malic acid are especially preferred.

Most preferably, the acid source provides acidic compounds which have an average particle size in the range of from about 75 microns to 1180 microns, more preferably from 150 microns to about 710 microns, calculated by sieving a sample of the source of acidity

15 on a series of Tyler sieves.

As discussed above, the effervescence system preferably comprises an alkali source, however, for the purpose of the invention, it should be understood that the alkali source may be part of the effervescence particle or can be part of the cleaning composition

20 comprising the particle, or can be present in the washing liquor, whereto the particle or the cleaning composition is added.

Any alkali source which has the capacity to react with the acid source to produce a gas may be present in the particle, which may be any gas known in the art, including nitrogen

25 oxygen and carbondioxide gas. Preferred can be perhydrate bleaches, including perborate, and silicate material. The alkali source is preferably substantially anhydrous or non-hygroscopic. It may be preferred that the alkali source is overdried.

Preferably this gas is carbon dioxide, and therefore the alkali source is a preferably a

30 source of carbonate, which can be any source of carbonate known in the art. In a preferred embodiment, the carbonate source is a carbonate salt. Examples of preferred carbonates

are the alkaline earth and alkali metal carbonates, including sodium or potassium carbonate, bicarbonate and sesqui-carbonate and any mixtures thereof with ultra-fine calcium carbonate such as are disclosed in German Patent Application No. 2,321,001 published on November 15, 1973. Alkali metal percarbonate salts are also suitable sources of carbonate species, which may be present combined with one or more other carbonate sources.

The carbonate and bicarbonate preferably have an amorphous structure. The carbonate and/ or bicarbonates may be coated with coating materials. It can be preferred that the particles of carbonate and bicarbonate can have a mean particle size of 75 microns or preferably 150µm or greater, more preferably of 250µm or greater, preferably 500µm or greater. It may be preferred that the carbonate salt is such that fewer than 20% (by weight) of the particles have a particle size below 500µm, calculated by sieving a sample of the carbonate or bicarbonate on a series of Tyler sieves. Alternatively or in addition to the previous carbonate salt, it may be preferred that the fewer than 60% or even 25% of the particles have a particle size below 150µm, whilst fewer than 5% has a particle size of more than 1.18 mm, more preferably fewer than 20% have a particle size of more than 212 µm, calculated by sieving a sample of the carbonate or bicarbonate on a series of Tyler sieves.

20

The molecular ratio of the acid source to the alkali source present in the particle core is preferably from 50:1 to 1:50, more preferably from 20:1 to 1:20 more preferably from 10:1 to 1:10, more preferably from 5:1 to 1:3, more preferably from 3:1 to 1:2, more preferably from 2:1 to 1:2.

25

Stabilising Agent

The preferred stabilising agents are substantially anhydrous stabilising agent. The stabilising agent can comprise one or more components. It can be preferred that the stabilising agent comprises compounds which are, at least partially, water-soluble.

30

Preferably, the stabilising agent is solid under normal storage conditions, e.g. the component preferably has a melting point above 30°C, more preferably above 45°C, or even more preferably above 50°C and it may be preferred that the stabilising agent is such that it readily forms a melt above 80°C.

5

Preferably, the stabilising agent comprises one or more components, selected from the group comprising alkoxylated alcohols, including polyethylene and/or propylene glycols, and alkoxylated alcoholamides, including ethanolamides, alkoxylated ethanol amides, alkoxylated fatty acid amides or ethanolamides and specific non-ionic surfactants, including (polyhydroxy) fatty acid amides, alkoxylated alcohol surfactants and specific alkylpolysaccharides surfactant, and mixtures of any of these compounds, as described herein.

Preferably, one or more of the components comprised in the stabilising agent are a detergent active which can contribute to the cleaning performance of the particle or the cleaning composition comprising the particle. Highly preferred substantially anhydrous components suitable in the stabilising agent of the particle of the invention, are one or more non-ionic surfactant, selected from the group of non-ionic alkoxylated surfactants, including alkoxylated alcohol surfactants, polyhydroxyfattyacid amide surfactants, fatty acid amide surfactants, alkoxylated fatty acid amides, alkyl esters of fatty acids and alkylpolysaccharide surfactants, and mixtures thereof, as described herein after.

In a highly preferred aspect of the invention, the stabilising agent comprises a mixture of polyhydroxy fatty acid amides and/ or polyethylene glycols, and/ or alkoxylated fatty acid amides and/ or condensation products of aliphatic alcohols with from 1 to 15, or more preferably 11, moles of alkylene oxide, as described in more detail below in the description of suitable surfactants. When present, the ratio of the polyhydroxy fatty acid amides to the condensation products of aliphatic alcohols is preferably from 20:1 to 1:20, more preferably from 10:1 to 1:10, more preferably from 8:1 to 1:8, more preferably from 6:1 to 1:6, most preferably from 2:1 to 1:3. When present, the ratio of the polyhydroxy fatty acid amides to the polyethylene glycol is preferably from 20:1 to 1:8, more preferably from

15:1 to 1:3, more preferably from 12:1 to 1:1, more preferably from 10:1 to 1:1. When present, the ratio of the polyhydroxy fatty acid amides to the alkoxyated fatty acid amides is preferably from 20:1 to 1:20, more preferably from 15:1 to 1:10, more preferably from 10:1 to 1:10.

5

Surfactants suitable for use in the Detergent Composition

The detergent compositions of the invention can contain one or more surfactants selected from anionic, cationic, ampholytic, amphoteric and zwitterionic surfactants or nonionic surfactants as described below, and mixtures thereof.

10

A typical listing of these surfactants, is given in U.S.P. 3,929,678 issued to Laughlin and Heuring on December 30, 1975. Further examples are given in "Surface Active Agents and Detergents" (Vol. I and II by Schwartz, Perry and Berch). A list of suitable cationic surfactants is given in U.S.P. 4,259,217 issued to Murphy on March 31, 1981. Some examples are given below.

15

Anionic Surfactant

Any anionic surfactant can be incorporated in the compositions of the invention.

The anionic surfactant herein preferably comprises at least a sulphate surfactant and/ or a sulphonate surfactant or mixtures thereof. It may be preferred that the anionic surfactant comprises only alkyl sulphonate surfactant or optionally combined with fatty acids or soap salts thereof. Alternatively, it may be preferred that the composition comprises only alkyl sulphate surfactant, but hereby it is preferred that at least a mid-chain branched alkyl surfactant is present or at least two alkyl surfactants are present.

20

Depending on the precise formulation of the composition and the use thereof, it may be preferred that the compositions herein comprise a particulate component, as described above, preferably in the form of a flake of an alkyl sulfate or sulphonate surfactant, preferably an alkyl benzene sulphonate, present at a concentration of from 85% to 95% of the particle or flake, the balance being an sulfate salt and moisture, the particle or flake being admixed to the other detergent component(s) or ingredients.

25


30

- Other possible anionic surfactants include the isethionates such as the acyl isethionates, N-acyl taurates, fatty acid amides of methyl tauride, alkyl succinates and sulfosuccinates, monoesters of sulfosuccinate (especially saturated and unsaturated C₁₂-C₁₈ monoesters)
- 5 diesters of sulfosuccinate (especially saturated and unsaturated C₆-C₁₄ diesters), N-acyl sarcosinates. Resin acids and hydrogenated resin acids are also suitable, such as rosin, hydrogenated rosin, and resin acids and hydrogenated resin acids present in or derived from tallow oil.
- 10 Depending on the precise formulation of the composition and the use thereof, it may be preferred that the compositions herein comprise a component which contains high levels of an alkyl sulphate or sulphonate surfactant or mixtures thereof, preferably an alkyl benzene sulphonate, intimately mixed with an sulphate salt and moisture. For example, such a component comprising from 85% to 95% of one an anionic sulphate or sulphonate
- 15 surfactant and from 15% to 5% sulphate salt and moisture. Such a component may be in the form of a flake, which can be admixed or dry-added to the other components of the detergent composition herein.

Anionic Sulphonate Surfactant

- 20 The anionic sulphonate surfactants in accordance with the invention include the salts of C₅-C₂₀ linear or branched alkylbenzene sulphonates, alkyl ester sulphonates, C₆-C₂₂ primary or secondary alkane sulphonates, C₆-C₂₄ olefin sulphonates, sulphonated polycarboxylic acids, and any mixtures thereof.
- 25 Highly preferred is a C₁₂-C₁₆ linear alkylbenzene sulphonate. Preferred salts are sodium and potassium salts.

The alkyl ester sulphonated surfactant are also suitable for the invention, preferably those of formula



wherein R^1 is a C_6 - C_{22} hydrocarbyl, R^2 is a C_1 - C_6 alkyl, A is a C_6 - C_{22} alkylene, alkenylene, x is 0 or 1, and M is a cation. The counterion M is preferably sodium,
 5 potassium or ammonium.

The alkyl ester sulphonated surfactant is preferably a α -sulpho alkyl ester of the formula above, whereby thus x is 0. Preferably, R^1 is an alkyl or alkenyl group of from 10 to 22, preferably 16 C atoms and x is preferably 0. R^2 is preferably ethyl or more preferably
 10 methyl.

It can be preferred that the R^1 of the ester is derived from unsaturated fatty acids, with preferably 1, 2 or 3 double bonds. It can also be preferred that R^1 of the ester is derived from a natural occurring fatty acid, preferably palmitic acid or stearic acid or mixtures
 15 thereof.

Anionic Alkyl Sulphate Surfactant

The anionic sulphate surfactant herein include the linear and branched primary and secondary alkyl sulphates and disulphates, alkyl ethoxysulphates having an average
 20 ethoxylation number of 3 or below, fatty oleoyl glycerol sulphates, alkyl phenol ethylene oxide ether sulphates, the C_5 - C_{17} acyl-N-(C_1 - C_4 alkyl) and -N-(C_1 - C_2 hydroxyalkyl) glucamine sulphates, and sulphates of alkylpolysaccharides.

Primary alkyl sulphate surfactants are preferably selected from the linear and branched
 25 primary C_{10} - C_{18} alkyl sulphates, more preferably the C_{11} - C_{15} linear or branched chain alkyl sulphates, or more preferably the C_{12} - C_{14} linear chain alkyl sulphates.

Preferred secondary alkyl sulphate surfactant are of the formula



wherein R^3 is a C_8 - C_{20} hydrocarbyl, R^4 is a hydrocarbyl and M is a cation.

- 5 Alkyl ethoxy sulphate surfactants are preferably selected from the group consisting of the C_{10} - C_{18} alkyl sulphates which have been ethoxylated with from 0.5 to 3 moles of ethylene oxide per molecule. More preferably, the alkyl ethoxysulphate surfactant is a C_{11} - C_{18} , most preferably C_{11} - C_{15} alkyl sulphate which has been ethoxylated with from 0.5 to 3, preferably from 1 to 3, moles of ethylene oxide per molecule.


10

A particularly preferred aspect of the invention employs mixtures of the preferred alkyl sulphate and alkyl ethoxysulphate surfactants. Preferred salts are sodium and potassium salts.

15

Mid-chain branched anionic surfactants

Preferred mid-chain branched primary alkyl sulfate surfactants for use herein are of the formula




- These surfactants have a linear primary alkyl sulfate chain backbone (i.e., the longest linear carbon chain which includes the sulfated carbon atom) which preferably comprises from 12 to 19 carbon atoms and their branched primary alkyl moieties comprise preferably a total of at least 14 and preferably no more than 20, carbon atoms. In the surfactant system
- 25 comprising more than one of these sulfate surfactants, the average total number of carbon atoms for the branched primary alkyl moieties is preferably within the range of from greater than 14.5 to about 17.5. Thus, the surfactant system preferably comprises at least one branched primary alkyl sulfate surfactant compound having a longest linear carbon chain of not less than 12 carbon atoms or not more than 19 carbon atoms, and the total

number of carbon atoms including branching must be at least 14, and further the average total number of carbon atoms for the branched primary alkyl moiety is within the range of greater than 14.5 to about 17.5.

- 5 R, R¹, and R² are each independently selected from hydrogen and C₁-C₃ alkyl group (preferably hydrogen or C₁-C₂ alkyl, more preferably hydrogen or methyl, and most preferably methyl), provided R, R¹, and R² are not all hydrogen. Further, when z is 1, at least R or R¹ is not hydrogen.
- 10 M is hydrogen or a salt forming cation depending upon the method of synthesis. w is an integer from 0 to 13; x is an integer from 0 to 13; y is an integer from 0 to 13; z is an integer of at least 1; and w + x + y + z is an integer from 8 to 14.

- A preferred mid-chain branched primary alkyl sulfate surfactant is, a C16 total carbon
- 15 primary alkyl sulfate surfactant having 13 carbon atoms in the backbone and having 1, 2, or 3 branching units (i.e., R, R¹ and/or R²) of in total 3 carbon atoms, (whereby thus the total number of carbon atoms is at least 16). Preferred branching units can be one propyl branching unit or three methyl branching units.
- 20 Another preferred surfactant are branched primary alkyl sulfates having the formula




- wherein the total number of carbon atoms, including branching, is from 15 to 18, and when more than one of these sulfates is present, the average total number of carbon atoms in the
- 25 branched primary alkyl moieties having the above formula is within the range of greater than 14.5 to about 17.5; R¹ and R² are each independently hydrogen or C₁-C₃ alkyl; M is a water soluble cation; x is from 0 to 11; y is from 0 to 11; z is at least 2; and x + y + z is from 9 to 13; provided R¹ and R² are not both hydrogen.

Dianionic Surfactants

The dianionic surfactants are also useful anionic surfactants for the present invention, in particular those of formula

5




- 10 where R is an, optionally substituted, alkyl, alkenyl, aryl, alkaryl, ether, ester, amine or amide group of chain length C₁ to C₂₈, preferably C₃ to C₂₄, most preferably C₈ to C₂₀, or hydrogen; A and B are independently selected from alkylene, alkenylene, (poly) alkoxyethylene, hydroxyalkylene, arylalkylene or amido alkylene groups of chain length C₁ to C₂₈ preferably C₁ to C₅, most preferably C₁ or C₂, or a covalent bond, and preferably A
- 15 and B in total contain at least 2 atoms; A, B, and R in total contain from 4 to about 31 carbon atoms; X and Y are anionic groups selected from the group comprising carboxylate, and preferably sulfate and sulfonate, z is 0 or preferably 1; and M is a cationic moiety, preferably a substituted or unsubstituted ammonium ion, or an alkali or alkaline earth metal ion.

20

The most preferred dianionic surfactant has the formula as above where R is an alkyl group of chain length from C₁₀ to C₁₈, A and B are independently C₁ or C₂, both X and Y are sulfate groups, and M is a potassium, ammonium, or a sodium ion.


- 25 Preferred dianionic surfactants herein include:

(a) 3 disulphate compounds, preferably 1,3 C7-C23 (i.e., the total number of carbons in the molecule) straight or branched chain alkyl or alkenyl disulphates, more preferably having the formula:




wherein R is a straight or branched chain alkyl or alkenyl group of chain length from about C₄ to about C₂₀;

10 (b) 1,4 disulphate compounds, preferably 1,4 C8-C22 straight or branched chain alkyl or alkenyl disulphates, more preferably having the formula:



wherein R is a straight or branched chain alkyl or alkenyl group of chain length from about C₄ to about C₁₈; preferred R are selected from octanyl, nonanyl, decyl, dodecyl, 15 tetradecyl, hexadecyl, octadecyl, and mixtures thereof; and

(c) 1,5 disulphate compounds, preferably 1,5 C9-C23 straight or branched chain alkyl or alkenyl disulphates, more preferably having the formula:

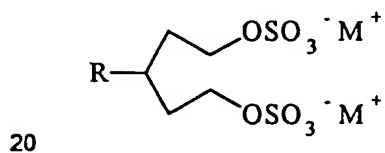

wherein R is a straight or branched chain alkyl or alkenyl group of chain length from about C₄ to about C₁₈.


It can be preferred that the dianionic surfactants of the invention are alkoxyated dianionic surfactants.

The alkoxyated dianionic surfactants of the invention comprise a structural skeleton of at least five carbon atoms, to which two anionic substituent groups spaced at least three atoms apart are attached. At least one of said anionic substituent groups is an alkoxy-linked sulphate or sulphonate group. Said structural skeleton can for example comprise any of the groups consisting of alkyl, substituted alkyl, alkenyl, aryl, alkaryl, ether, ester, amine and amide groups. Preferred alkoxy moieties are ethoxy, propoxy, and combinations thereof.

The structural skeleton preferably comprises from 5 to 32, preferably 7 to 28, most preferably 12 to 24 atoms. Preferably the structural skeleton comprises only carbon-containing groups and more preferably comprises only hydrocarbyl groups. Most preferably the structural skeleton comprises only straight or branched chain alkyl groups.

The structural skeleton is preferably branched. Preferably at least 10 % by weight of the structural skeleton is branched and the branches are preferably from 1 to 5, more preferably from 1 to 3, most preferably from 1 to 2 atoms in length (not including the sulphate or sulphonate group attached to the branching).


A preferred alkoxyated dianionic surfactant has the formula



25

where R is an, optionally substituted, alkyl, alkenyl, aryl, alkaryl, ether, ester, amine or amide group of chain length C₁ to C₂₈, preferably C₃ to C₂₄, most preferably C₈ to C₂₀, or hydrogen; A and B are independently selected from, optionally substituted, alkyl and

- alkenyl group of chain length C_1 to C_{28} , preferably C_1 to C_5 , most preferably C_1 or C_2 , or a covalent bond; EO/PO are alkoxy moieties selected from ethoxy, propoxy, and mixed ethoxy/propoxy groups, wherein n and m are independently within the range of from about 0 to about 10, with at least m or n being at least 1; A and B in total contain at least 2
- 5 atoms; A, B, and R in total contain from 4 to about 31 carbon atoms; X and Y are anionic groups selected from the group consisting of sulphate and sulphonate, provided that at least one of X or Y is a sulfate group; and M is a cationic moiety, preferably a substituted or unsubstituted ammonium ion, or an alkali or alkaline earth metal ion.
- 10 The most preferred alkoxyated dianionic surfactant has the formula as above where R is an alkyl group of chain length from C_{10} to C_{18} , A and B are independently C_1 or C_2 , n and m are both 1, both X and Y are sulfate groups, and M is a potassium, ammonium, or a sodium ion.
- 15 Preferred alkoxyated dianionic surfactants herein include:
ethoxylated and/or propoxylated disulphate compounds, preferably C_{10} - C_{24} straight or branched chain alkyl or alkenyl ethoxylated and/or propoxylated disulphates, more preferably having the formulae:



- 20 wherein R is a straight or branched chain alkyl or alkenyl group of chain length from about C_6 to about C_{18} ; EO/PO are alkoxy moieties selected from ethoxy, propoxy, and mixed ethoxy/propoxy groups; and n and m are independently within the range of from about 0 to about 10 (preferably from about 0 to about 5), with at least m or n being 1.

25 Anionic Carboxylate Surfactant

Suitable anionic carboxylate surfactants include the alkyl ethoxy carboxylates, the alkyl polyethoxy polycarboxylate surfactants and the soaps ('alkyl carboxyls'), especially certain secondary soaps as described herein.

Suitable alkyl ethoxy carboxylates include those with the formula $RO(CH_2CH_2O)_xCH_2COO^-M^+$ wherein R is a C_6 to C_{18} alkyl group, x ranges from 0 to 10, and the ethoxylate distribution is such that, on a weight basis, the amount of material where x is 0 is less than 20 % and M is a cation. Suitable alkyl polyethoxy polycarboxylate surfactants include those having the formula $RO-(CHR_1-CHR_2-O)-R_3$ wherein R is a C_6 to C_{18} alkyl group, x is from 1 to 25, R_1 and R_2 are selected from the group consisting of hydrogen, methyl acid radical, succinic acid radical, hydroxysuccinic acid radical, and mixtures thereof, and R_3 is selected from the group consisting of hydrogen, substituted or unsubstituted hydrocarbon having between 1 and 8 carbon atoms, and mixtures thereof.

Suitable soap surfactants include the secondary soap surfactants which contain a carboxyl unit connected to a secondary carbon. Preferred secondary soap surfactants for use herein are water-soluble members selected from the group consisting of the water-soluble salts of 2-methyl-1-undecanoic acid, 2-ethyl-1-decanoic acid, 2-propyl-1-nonanoic acid, 2-butyl-1-octanoic acid and 2-pentyl-1-heptanoic acid.

Certain soaps may also be included as suds suppressors.

20 Alkali Metal Sarcosinate Surfactant

Other suitable anionic surfactants are the alkali metal sarcosinates of formula $R-CON(R^1)CH_2COOM$, wherein R is a C_5 - C_{17} linear or branched alkyl or alkenyl group, R^1 is a C_1 - C_4 alkyl group and M is an alkali metal ion. Preferred examples are the myristyl and oleoyl methyl sarcosinates in the form of their sodium salts.

25

Non-ionic Alkoxylated Surfactants

When non-ionic surfactants are present, it may be preferred that the components of the compositors herein are free of sprayed-on non-ionic alkoxylated alcohol surfactants. It has been found that hereby the delivery of the composition to the washing water can be

improved and the caking of the product can be reduced. It may be preferred that the composition comprises a non-ionic surfactant which is solid at temperatures below 30°C or even 40°C, preferably present in an intimate mixture with other ingredients.

- 5 Essentially any alkoxyated non-ionic surfactants can also be comprised in the detergent compositions of the invention. The ethoxylated and propoxylated non-ionic surfactants are preferred. Preferred alkoxyated surfactants can be selected from the classes of the non-ionic condensates of alkyl phenols, non-ionic ethoxylated alcohols, non-ionic ethoxylated/propoxylated fatty alcohols, non-ionic ethoxylate/propoxylate condensates
10 with propylene glycol, and the non-ionic ethoxylate condensation products with propylene oxide/ethylene diamine adducts.

- Highly preferred are non-ionic alkoxyated alcohol surfactants, being the condensation products of aliphatic alcohols with from 1 to 75 moles of alkylene oxide, in particular
15 about 50 or from 1 to 15 moles, preferably to 11 moles, particularly ethylene oxide and/or propylene oxide, are highly preferred non-ionic surfactant comprised in the anhydrous component of the particles of the invention. The alkyl chain of the aliphatic alcohol can either be straight or branched, primary or secondary, and generally contains from 6 to 22 carbon atoms. Particularly preferred are the condensation products of alcohols having an
20 alkyl group containing from 8 to 20 carbon atoms with from 2 to 9 moles and in particular 3 or 5 moles, of ethylene oxide per mole of alcohol.

Non-ionic Polyhydroxy Fatty Acid Amide Surfactant

- Polyhydroxy fatty acid amides are highly preferred non-ionic surfactants for use in the invention, in particular those having the structural formula R^2CONR^1Z wherein: R^1 is H, C_1 - C_{18} , preferably C_1 - C_4 hydrocarbyl, 2-hydroxy ethyl, 2-hydroxy propyl, ethoxy, propoxy, or a mixture thereof, preferably C_1 - C_4 alkyl, more preferably C_1 or C_2 alkyl, most preferably C_1 alkyl (i.e., methyl); and R^2 is a C_5 - C_{31} hydrocarbyl, preferably straight-chain C_5 - C_{19} or C_7 - C_{19} alkyl or alkenyl, more preferably straight-chain C_9 - C_{17} alkyl or alkenyl, most preferably straight-chain C_{11} - C_{17} alkyl or alkenyl, or mixture thereof; and Z
- is a polyhydroxyhydrocarbyl having a linear hydrocarbyl chain with at least 3 hydroxyls directly connected to the chain, or an alkoxylated derivative (preferably ethoxylated or propoxylated) thereof. Z preferably will be derived from a reducing sugar in a reductive amination reaction; more preferably Z is a glycyl.
- A highly preferred non-ionic polyhydroxy fatty acid amide surfactant for use herein is a C_{12} - C_{14} , a C_{15} - C_{17} and/or C_{16} - C_{18} alkyl N-methyl glucamide.

It may be particularly that mixtures of a C_{12} - C_{18} alkyl N-methyl glucamide and a condensation product of an alcohol having an alkyl group containing from 8 to 20 carbon atoms with from 2 to 9 moles and in particular 3 or 5 moles, of ethylene oxide per mole of alcohol.

The polyhydroxy fatty acid amide can be prepared by any suitable process. One particularly preferred process is described in detail in WO 9206984.

Non-ionic Fatty Acid Amide Surfactant

Fatty acid amide surfactants or alkoxylated fatty acid amides include those having the formula: $R^6CON(R^7)(R^8)$ wherein R^6 is an alkyl group containing from 7 to 21, preferably from 9 to 17 carbon or even 11 to 13 carbon atoms and R^7 and R^8 are each

individually selected from the group consisting of hydrogen, C₁-C₄ alkyl, C₁-C₄ hydroxyalkyl, and -(C₂H₄O)_xH, where x is in the range of from 1 to 11, preferably 1 to 7, more preferably from 1-5, whereby it may be preferred that R⁷ is different to R⁸, one having x being 1 or 2, one having x being from 3 to 11 or preferably 5.

5


Non-ionic Alkyl Esters of Fatty Acid Surfactant

Alkyl esters of fatty acids include those having the formula: R⁹COO(R¹⁰) wherein R⁹ is an alkyl group containing from 7 to 21, preferably from 9 to 17 carbon or even 11 to 13 carbon atoms and R¹⁰ is a C₁-C₄ alkyl, C₁-C₄ hydroxyalkyl, or -(C₂H₄O)_xH, where x is
 10 in the range of from 1 to 11, preferably 1 to 7, more preferably from 1-5, whereby it may be preferred that R¹⁰ is a methyl or ethyl group.

Non-ionic Alkylpolysaccharide Surfactant

Alkylpolysaccharides can also be comprised in the anhydrous material of the particle of the
 15 invention, such as those disclosed in U.S. Patent 4,565,647, Llenado, issued January 21, 1986, having a hydrophobic group containing from 6 to 30 carbon atoms and a polysaccharide, e.g., a polyglycoside, hydrophilic group containing from 1.3 to 10 saccharide units.

20 Preferred alkylpolyglycosides have the formula



wherein R² is selected from the group consisting of alkyl, alkylphenyl, hydroxyalkyl,
 25 hydroxyalkylphenyl, and mixtures thereof in which the alkyl groups contain from 10 to 18 carbon atoms; n is 2 or 3; t is from 0 to 10, and x is from 1.3 to 8. The glycosyl is preferably derived from glucose.

Cationic Surfactant

Another preferred component of the compositions of the invention is a cationic surfactant, which is preferably be present at a level of from 0.1% to 60% by weight of the composition, more preferably from 0.4% to 20%, most preferably from 0.5% to 5% by weight of the composition.

5


When present, the ratio of the anionic surfactant to the cationic surfactant is preferably from 25:1 to 1:3, more preferably from 15:1 to 1:1, most preferably from 10:1 to 1:1. The ratio of cationic surfactant to the stabilising agent is preferably from 1:30 to 20:1, more preferably from 1:20 to 10:1.

10

Preferably the cationic surfactant is selected from the group consisting of cationic ester surfactants, cationic mono-alkoxylated amine surfactants, cationic bis-alkoxylated amine surfactants and mixtures thereof.

15 Cationic Mono-Alkoxylated Amine Surfactants

The optional cationic mono-alkoxylated amine surfactant for use herein, has the general formula:




20

wherein R^1 is an alkyl or alkenyl moiety containing from about 6 to about 18 carbon atoms, preferably 6 to about 16 carbon atoms, most preferably from about 6 to about 11 carbon atoms; R^2 and R^3 are each independently alkyl groups containing from one to about three carbon atoms, preferably methyl; R^4 is selected from hydrogen (preferred), methyl and ethyl, X^- is an anion such as chloride, bromide, methylsulfate, sulphate, or the like, to provide electrical neutrality; A is selected from C_1 - C_4 alkoxy, especially ethoxy

25

(i.e., $-\text{CH}_2\text{CH}_2\text{O}-$), propoxy, butoxy and mixtures thereof; and p is from 1 to about 30, preferably 1 to about 15, most preferably 1 to about 8.

Highly preferred cationic mono-alkoxylated amine surfactants for use herein are of the
5 formula




wherein R^1 is C_6 - C_{18} hydrocarbyl and mixtures thereof, preferably C_6 - C_{14} , especially
10 C_6 - C_{11} alkyl, preferably C_8 and C_{10} alkyl, and X is any convenient anion to provide charge balance, preferably chloride or bromide.

As noted, compounds of the foregoing type include those wherein the ethoxy ($\text{CH}_2\text{CH}_2\text{O}$) units (EO) are replaced by butoxy, isopropoxy [$\text{CH}(\text{CH}_3)\text{CH}_2\text{O}$] and [$\text{CH}_2\text{CH}(\text{CH}_3)\text{O}$]
15 units (i-Pr) or n-propoxy units (Pr), or mixtures of EO and/or Pr and/or i-Pr units.

Cationic Bis-Alkoxylated Amine Surfactant

The cationic bis-alkoxylated amine surfactant for use herein, has the general formula:




20

wherein R^1 is an alkyl or alkenyl moiety containing from about 6 to about 18 carbon atoms, preferably 6 to about 16 carbon atoms, more preferably 6 to about 11, most preferably from about 8 to about 10 carbon atoms; R^2 is an alkyl group containing from one to three carbon atoms, preferably methyl; R^3 and R^4 can vary independently and are

selected from hydrogen (preferred), methyl and ethyl, X^- is an anion such as chloride, bromide, methylsulfate, sulphate, or the like, sufficient to provide electrical neutrality. A and A' can vary independently and are each selected from C_1 - C_4 alkoxy, especially ethoxy, (i.e., $-CH_2CH_2O-$), propoxy, butoxy and mixtures thereof; p is from 1 to about 30, preferably 1 to about 4 and q is from 1 to about 30, preferably 1 to about 4, and most preferably both p and q are 1.


Highly preferred cationic bis-alkoxylated amine surfactants for use herein are of the formula



wherein R^1 is C_6 - C_{18} hydrocarbyl and mixtures thereof, preferably C_6 , C_8 , C_{10} , C_{12} , C_{14} alkyl and mixtures thereof. X is any convenient anion to provide charge balance, preferably chloride. With reference to the general cationic bis-alkoxylated amine structure noted above, since in a preferred compound R^1 is derived from (coconut) C_{12} - C_{14} alkyl fraction fatty acids, R^2 is methyl and ApR^3 and $A'qR^4$ are each monoethoxy.

Other cationic bis-alkoxylated amine surfactants useful herein include compounds of the formula:

20



wherein R^1 is C_6 - C_{18} hydrocarbyl, preferably C_6 - C_{14} alkyl, independently p is 1 to about 3 and q is 1 to about 3, R^2 is C_1 - C_3 alkyl, preferably methyl, and X is an anion, especially chloride or bromide.

- 5 Other compounds of the foregoing type include those wherein the ethoxy (CH_2CH_2O) units (EO) are replaced by butoxy (Bu) isopropoxy [$CH(CH_3)CH_2O$] and [$CH_2CH(CH_3O)$] units (i-Pr) or n-propoxy units (Pr), or mixtures of EO and/or Pr and/or i-Pr units.

10 Amphoteric Surfactant

Suitable amphoteric surfactants for use herein include the amine oxide surfactants and the alkyl amphocarboxylic acids.

Suitable amine oxides include those compounds having the formula $R^3(OR^4)_xN^0(R^5)_2$

- 15 wherein R^3 is selected from an alkyl, hydroxyalkyl, acylamidopropoyl and alkyl phenyl group, or mixtures thereof, containing from 8 to 26 carbon atoms; R^4 is an alkylene or hydroxyalkylene group containing from 2 to 3 carbon atoms, or mixtures thereof; x is from 0 to 5, preferably from 0 to 3; and each R^5 is an alkyl or hydroxyalkyl group containing from 1 to 3, or a polyethylene oxide group containing from 1 to 3 ethylene oxide groups.
- 20 Preferred are C_{10} - C_{18} alkyl dimethylamine oxide, and C_{10-18} acylamido alkyl dimethylamine oxide.

A suitable example of an alkyl amphocarboxylic acid is Miranol(TM) C2M Conc. manufactured by Miranol, Inc., Dayton, NJ.

25

Zwitterionic Surfactant

Zwitterionic surfactants can also be incorporated into the particle of the invention or the compositions containing the particle of the invention. These surfactants can be broadly described as derivatives of secondary and tertiary amines, derivatives of heterocyclic

secondary and tertiary amines, or derivatives of quaternary ammonium, quaternary phosphonium or tertiary sulfonium compounds. Betaine and sultaine surfactants are exemplary zwitterionic surfactants for use herein.

- 5 Suitable betaines are those compounds having the formula $R(R')_2N^+R^2COO^-$ wherein R is a C₆-C₁₈ hydrocarbyl group, each R¹ is typically C₁-C₃ alkyl, and R² is a C₁-C₅ hydrocarbyl group. Preferred betaines are C₁₂-18 dimethyl-ammonio hexanoate and the C₁₀-18 acylamidopropane (or ethane) dimethyl (or diethyl) betaines. Complex betaine surfactants are also suitable for use herein.

10

Additional Detergent Ingredients

- The detergent composition of the invention can comprise any additional deterative actives or ingredients known in the art. The precise nature of these additional components, and levels of incorporation thereof will depend on the physical form of the composition, and
- 15 the precise nature of the washing operation for which it is to be used.

Other preferred ingredients comprise a perfume, brightener or dye or mixtures thereof, which may be sprayed onto the particular component herein.

- 20 The compositions of the invention preferably contain one or more additional detergent components selected from surfactants, bleaches, builders, chelants, (additional) alkalinity sources, organic polymeric compounds, enzymes, brighteners, suds suppressors, lime soap dispersants, soil suspension and anti-redeposition agents and corrosion inhibitors.

25 Heavy metal ion sequestrant

- Heavy metal ion sequestrant are also useful additional ingredients herein. By heavy metal ion sequestrant it is meant herein components which act to sequester (chelate) heavy metal ions. These components may also have calcium and magnesium chelation capacity, but preferentially they show selectivity to binding heavy metal ions such as iron, manganese
- 30 and copper.

Heavy metal ion sequestrants are generally present at a level of from 0.005% to 10%, preferably from 0.1% to 5%, more preferably from 0.25% to 7.5% and most preferably from 0.3% to 2% by weight of the compositions.

5

Suitable heavy metal ion sequestrants for use herein include organic phosphonates, such as the amino alkylene poly (alkylene phosphonates), alkali metal ethane 1-hydroxy diphosphonates and nitrilo trimethylene phosphonates.

10 Preferred among the above species are diethylene triamine penta (methylene phosphonate), ethylene diamine tri (methylene phosphonate) hexamethylene diamine tetra (methylene phosphonate) and hydroxy-ethylene 1,1 diphosphonate, 1,1 hydroxyethane diphosphonic acid and 1,1 hydroxyethane dimethylene phosphonic acid.

15 Other suitable heavy metal ion sequestrant for use herein include nitrilotriacetic acid and polyaminocarboxylic acids such as ethylenediaminetetracetic acid, ethylenediamine disuccinic acid, ethylenediamine diglutaric acid, 2-hydroxypropylenediamine disuccinic acid or any salts thereof.

20 Other suitable heavy metal ion sequestrants for use herein are iminodiacetic acid derivatives such as 2-hydroxyethyl diacetic acid or glyceryl imino diacetic acid, described in EP-A-317,542 and EP-A-399,133. The iminodiacetic acid-N-2-hydroxypropyl sulfonic acid and aspartic acid N-carboxymethyl N-2-hydroxypropyl-3-sulfonic acid sequestrants described in EP-A-516,102 are also suitable herein. The β -alanine-N,N'-diacetic acid,
25 aspartic acid-N,N'-diacetic acid, aspartic acid-N-monoacetic acid and iminodisuccinic acid sequestrants described in EP-A-509,382 are also suitable.

EP-A-476,257 describes suitable amino based sequestrants. EP-A-510,331 describes suitable sequestrants derived from collagen, keratin or casein. EP-A-528,859

30 describes a suitable alkyl iminodiacetic acid sequestrant. Dipicolinic acid and 2-phosphonobutane-1,2,4-tricarboxylic acid are also suitable. Glycinamide-N,N'-

disuccinic acid (GADS), ethylenediamine-N-N'-diglutamic acid (EDDG) and 2-hydroxypropylenediamine-N-N'-disuccinic acid (HPDDS) are also suitable.

- Especially preferred are diethylenetriamine pentacetic acid, ethylenediamine-N,N'-disuccinic acid (EDDS) and 1,1 hydroxyethane diphosphonic acid or the alkali metal, alkaline earth metal, ammonium, or substituted ammonium salts thereof, or mixtures thereof.

Perhydrate Bleaches

- 10 Preferably the detergent compositions of the invention comprise oxygen bleach, preferably comprising a hydrogen peroxide source and a bleach precursor or activator. Since the present invention improves product delivery to the wash, it increases bleach efficiency and reduces the risk of fabric damage by bleaches present in the detergent.
- 15 A preferred source of hydrogen peroxide is a perhydrate bleach, such as metal perborates, more preferably metal percarbonates, particularly the sodium salts. Perborate can be mono or tetra hydrated. Sodium percarbonate has the formula corresponding to $2\text{Na}_2\text{CO}_3 \cdot 3\text{H}_2\text{O}_2$, and is available commercially as a crystalline solid.
- 20 In particular the percarbonate salts are preferably coated. Suitable coating agent are known in the art, and include silicates, magnesium salts and carbonates salts.

Potassium peroxymonopersulfate, sodium per is another optional inorganic perhydrate salt of use in the detergent compositions herein.

25

Organic Peroxyacid Bleaching System

- A preferred feature of the composition herein is an organic peroxyacid bleaching system. In one preferred execution the bleaching system contains a hydrogen peroxide source and an organic peroxyacid bleach precursor compound. The production of the organic
- 30 peroxyacid occurs by an in situ reaction of the precursor with a source of hydrogen peroxide. Preferred sources of hydrogen peroxide include inorganic perhydrate bleaches,

such as the perborate bleach of the claimed invention. In an alternative preferred execution a preformed organic peroxyacid is incorporated directly into the composition.


Compositions containing mixtures of a hydrogen peroxide source and organic peroxyacid precursor in combination with a preformed organic peroxyacid are also envisaged.

5

Peroxyacid Bleach Precursor


Peroxyacid bleach precursors are compounds which react with hydrogen peroxide in a perhydrolysis reaction to produce a peroxyacid. Generally peroxyacid bleach precursors may be represented as

10



where L is a leaving group and X is essentially any functionality, such that on perhydrolysis the structure of the peroxyacid produced is

15



Peroxyacid bleach precursor compounds are preferably incorporated at a level of from 0.5% to 20% by weight, more preferably from 1% to 15% by weight, most preferably from 1.5% to 10% by weight of the detergent compositions.

20

Suitable peroxyacid bleach precursor compounds typically contain one or more N- or O-acyl groups, which precursors can be selected from a wide range of classes. Suitable classes include anhydrides, esters, imides, lactams and acylated derivatives of imidazoles and oximes. Examples of useful materials within these classes are disclosed in GB-A-1586789. Suitable esters are disclosed in GB-A-836988, 864798, 1147871, 2143231 and EP-A-0170386.



25

Leaving Groups


The leaving group, hereinafter L group, must be sufficiently reactive for the perhydrolysis reaction to occur within the optimum time frame (e.g., a wash cycle). However, if L is too reactive, this activator will be difficult to stabilize for use in a bleaching composition.

5

Preferred L groups are selected from the group consisting of:

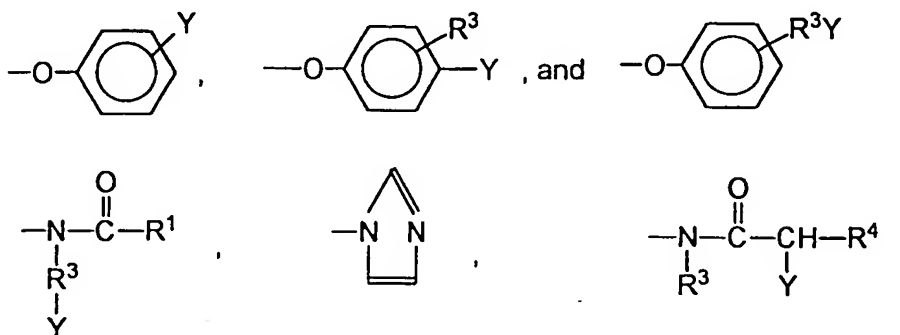

10

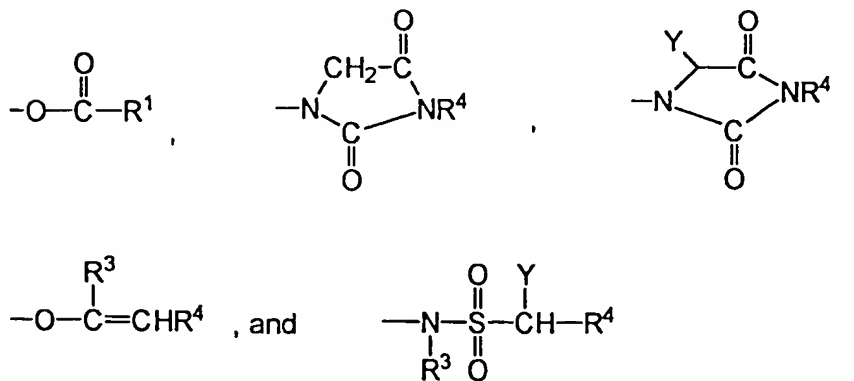

and mixtures thereof, wherein R^1 is an alkyl, aryl, or alkaryl group containing from 1 to 14

15 carbon atoms, R^3 is an alkyl chain containing from 1 to 8 carbon atoms, R^4 is H or R^3 ,

and Y is H or a solubilizing group. Any of R^1 , R^3 and R^4 may be substituted by essentially any functional group including, for example alkyl, hydroxy, alkoxy, halogen, amine, nitrosyl, amide and ammonium or alkyl ammonium groups.

- 5 The preferred solubilizing groups are $-\text{SO}_3^- \text{M}^+$, $-\text{CO}_2^- \text{M}^+$, $-\text{SO}_4^- \text{M}^+$, $-\text{N}^+(\text{R}^3)_4 \text{X}^-$ and $\text{O}=\text{N}(\text{R}^3)_3$ and most preferably $-\text{SO}_3^- \text{M}^+$ and $-\text{CO}_2^- \text{M}^+$ wherein R^3 is an alkyl chain containing from 1 to 4 carbon atoms, M is a cation which provides solubility to the bleach activator and X is an anion which provides solubility to the bleach activator. Preferably, M is an alkali metal, ammonium or substituted ammonium cation, with sodium and potassium
10 being most preferred, and X is a halide, hydroxide, methylsulfate or acetate anion.

Alkyl Percarboxylic Acid Bleach Precursors

Alkyl percarboxylic acid bleach precursors form percarboxylic acids on perhydrolysis. Preferred precursors of this type provide peracetic acid on perhydrolysis.


15

- Preferred alkyl percarboxylic precursor compounds of the imide type include the N-, N,N¹N¹ tetra acetylated alkylene diamines wherein the alkylene group contains from 1 to 6 carbon atoms, particularly those compounds in which the alkylene group contains 1, 2 and 6 carbon atoms. Tetraacetyl ethylene diamine (TAED) is particularly preferred. The
20 TAED is preferably not present in the agglomerated particle of the present invention, but preferably present in the detergent composition, comprising the particle.

- Other preferred alkyl percarboxylic acid precursors include sodium 3,5,5-tri-methyl hexanoyloxybenzene sulfonate (iso-NOBS), sodium nonanoyloxybenzene sulfonate
25 (NOBS), sodium acetoxybenzene sulfonate (ABS) and pentaacetyl glucose.

Amide Substituted Alkyl Peroxyacid Precursors

Amide substituted alkyl peroxyacid precursor compounds are suitable herein, including those of the following general formulae:



- wherein R¹ is an alkyl group with from 1 to 14 carbon atoms, R² is an alkylene group containing from 1 to 14 carbon atoms, and R⁵ is H or an alkyl group containing 1 to 10 carbon atoms and L can be essentially any leaving group. Amide substituted bleach activator compounds of this type are described in EP-A-0170386.

Perbenzoic Acid Precursor


- Perbenzoic acid precursor compounds provide perbenzoic acid on perhydrolysis. Suitable O-acylated perbenzoic acid precursor compounds include the substituted and unsubstituted benzoyl oxybenzene sulfonates, and the benzoylation products of sorbitol, glucose, and all saccharides with benzoylating agents, and those of the imide type including N-benzoyl succinimide, tetrabenzoyl ethylene diamine and the N-benzoyl substituted ureas. Suitable imidazole type perbenzoic acid precursors include N-benzoyl imidazole and N-benzoyl benzimidazole. Other useful N-acyl group-containing perbenzoic acid precursors include N-benzoyl pyrrolidone, dibenzoyl taurine and benzoyl pyroglutamic acid.

20 Preformed Organic Peroxyacid

The detergent composition may contain, in addition to, or as an alternative to, an organic peroxyacid bleach precursor compound, a preformed organic peroxyacid, typically at a level of from 1% to 15% by weight, more preferably from 1% to 10% by weight of the composition.

25

A preferred class of organic peroxyacid compounds are the amide substituted compounds of the following general formulae:



wherein R¹ is an alkyl, aryl or alkaryl group with from 1 to 14 carbon atoms, R² is an alkylene, arylene, and alkarylene group containing from 1 to 14 carbon atoms, and R⁵ is H
 5 or an alkyl, aryl, or alkaryl group containing 1 to 10 carbon atoms. Amide substituted organic peroxyacid compounds of this type are described in EP-A-0170386.

Other organic peroxyacids include diacyl and tetraacylperoxides, especially diperoxydodecanedioc acid, diperoxytetradecanedioc acid and diperoxyhexadecanedioc
 10 acid. Mono- and diperazelaic acid, mono- and diperbrassylic acid and N-phthaloylaminoperoxicaproic acid are also suitable herein.

Enzyme

Another preferred ingredient useful herein is one or more additional enzymes.
 15

Preferred additional enzymatic materials include the commercially available lipases, cutinases, amylases, neutral and alkaline proteases, cellulases, endolases, esterases, pectinases, lactases and peroxidases conventionally incorporated into detergent compositions. Suitable enzymes are discussed in US Patents 3,519,570 and 3,533,139.

20

Organic Polymeric Compound

Organic polymeric compounds are preferred additional components of the compositions herein.

25 By organic polymeric compound it is meant herein essentially any polymeric organic compound commonly used as binder, dispersants, and anti-redeposition and soil suspension agents in detergent compositions, including any of the high molecular weight organic polymeric compounds described as clay flocculating agents herein, including quaternised ethoxylated (poly) amine clay-soil removal/ anti-redeposition agent.

Organic polymeric compound is typically incorporated in the detergent compositions of the invention at a level of from 0.01% to 30%, preferably from 0.1% to 15%, most preferably from 0.5% to 10% by weight of the compositions.

5

Examples of organic polymeric compounds include the water soluble organic homo- or copolymeric polycarboxylic acids or their salts in which the polycarboxylic acid comprises at least two carboxyl radicals separated from each other by not more than two carbon atoms. Polymers of the latter type are disclosed in GB-A-1,596,756. Examples of such salts are
10 polyacrylates of MWt 1000-5000 and their copolymers with maleic anhydride, such copolymers having a molecular weight of from 2000 to 100,000, especially 40,000 to 80,000.

The polyamino compounds are useful herein including those derived from aspartic acid
15 such as those disclosed in EP-A-305282, EP-A-305283 and EP-A-351629.

Terpolymers containing monomer units selected from maleic acid, acrylic acid, polyaspartic acid and vinyl alcohol, particularly those having an average molecular weight of from 5,000 to 10,000, are also suitable herein.


20

Other organic polymeric compounds suitable for incorporation in the detergent compositions herein include cellulose derivatives such as methylcellulose, carboxymethylcellulose, hydroxypropylmethylcellulose and hydroxyethylcellulose.

25 Further useful organic polymeric compounds are the polyethylene glycols, particularly those of molecular weight 1000-10000, more particularly 2000 to 8000 and most preferably about 4000.

Highly preferred polymeric components herein are cotton and non-cotton soil release
30 polymer according to U.S. Patent 4,968,451, Scheibel et al., and U.S. Patent 5,415,807, Gosselink et al., and in particular according to US application no.60/051517.

Another organic compound, which is a preferred clay dispersant/ anti-redeposition agent, for use herein, can be the ethoxylated cationic monoamines and diamines of the formula:

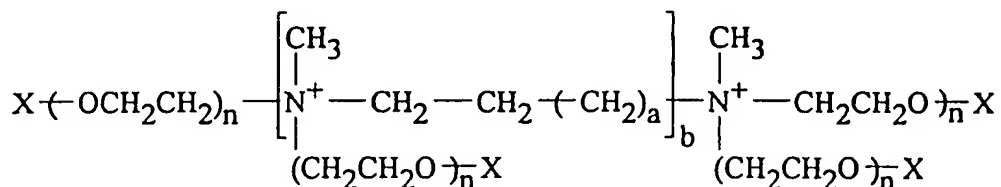

5

wherein X is a non-ionic group selected from the group consisting of H, C₁-C₄ alkyl or hydroxyalkyl ester or ether groups, and mixtures thereof, a is from 0 to 20, preferably from 0 to 4 (e.g. ethylene, propylene, hexamethylene) b is 1 or 0; for cationic monoamines (b=0), n is at least 16, with a typical range of from 20 to 35; for cationic diamines (b=1), n is at least about 12 with a typical range of from about 12 to about 42.

10

Other dispersants/ anti-redeposition agents for use herein are described in EP-B-011965 and US 4,659,802 and US 4,664,848.

15

Suds Suppressing System

The detergent compositions of the invention, when formulated for use in machine washing compositions, may comprise a suds suppressing system present at a level of from 0.01% to 15%, preferably from 0.02% to 10%, most preferably from 0.05% to 3% by weight of the composition.

20

Suitable suds suppressing systems for use herein may comprise essentially any known antifoam compound, including, for example silicone antifoam compounds and 2-alkyl alcanol antifoam compounds.

25

By antifoam compound it is meant herein any compound or mixtures of compounds which act such as to depress the foaming or sudsing produced by a solution of a detergent composition, particularly in the presence of agitation of that solution.

- 5 Particularly preferred antifoam compounds for use herein are silicone antifoam compounds defined herein as any antifoam compound including a silicone component. Such silicone antifoam compounds also typically contain a silica component. The term "silicone" as used herein, and in general throughout the industry, encompasses a variety of relatively high molecular weight polymers containing siloxane units and hydrocarbyl group of various types. Preferred silicone antifoam compounds are the siloxanes, particularly the polydimethylsiloxanes having trimethylsilyl end blocking units.

- Other suitable antifoam compounds include the monocarboxylic fatty acids and soluble salts thereof. These materials are described in US Patent 2,954,347, issued September 27, 15 1960 to Wayne St. John. The monocarboxylic fatty acids, and salts thereof, for use as suds suppressor typically have hydrocarbyl chains of 10 to 24 carbon atoms, preferably 12 to 18 carbon atoms. Suitable salts include the alkali metal salts such as sodium, potassium, and lithium salts, and ammonium and alkanolammonium salts.

- 20 Other suitable antifoam compounds include, for example, high molecular weight fatty esters (e.g. fatty acid triglycerides), fatty acid esters of monovalent alcohols, aliphatic C₁₈-C₄₀ ketones (e.g. stearone) N-alkylated amino triazines such as tri- to hexa-alkylmelamines or di- to tetra alkyl diamine chlortriazines formed as products of cyanuric chloride with two or three moles of a primary or secondary amine containing 1 to 24 carbon atoms, propylene oxide, bis stearic acid amide and monostearyl di-alkali metal (e.g. 25 sodium, potassium, lithium) phosphates and phosphate esters.

A preferred suds suppressing system comprises:

- 30 (a) antifoam compound, preferably silicone antifoam compound, most preferably a silicone antifoam compound comprising in combination

(i) polydimethyl siloxane, at a level of from 50% to 99%, preferably 75% to 95% by weight of the silicone antifoam compound; and

5 (ii) silica, at a level of from 1% to 50%, preferably 5% to 25% by weight of the silicone/silica antifoam compound;

wherein said silica/silicone antifoam compound is incorporated at a level of from 5% to 50%, preferably 10% to 40% by weight;

10

(b) a dispersant compound, most preferably comprising a silicone glycol rake copolymer with a polyoxyalkylene content of 72-78% and an ethylene oxide to propylene oxide ratio of from 1:0.9 to 1:1.1, at a level of from 0.5% to 10%, preferably 1% to 10% by weight; a particularly preferred silicone glycol rake
15 copolymer of this type is DCO544, commercially available from DOW Corning under the tradename DCO544;

(c) an inert carrier fluid compound, most preferably comprising a C₁₆-C₁₈ ethoxylated alcohol with a degree of ethoxylation of from 5 to 50, preferably 8 to
20 15, at a level of from 5% to 80%, preferably 10% to 70%, by weight;

A highly preferred particulate suds suppressing system is described in EP-A-0210731 and comprises a silicone antifoam compound and an organic carrier material having a melting point in the range 50°C to 85°C, wherein the organic carrier material comprises a
25 monoester of glycerol and a fatty acid having a carbon chain containing from 12 to 20 carbon atoms. EP-A-0210721 discloses other preferred particulate suds suppressing systems wherein the organic carrier material is a fatty acid or alcohol having a carbon chain containing from 12 to 20 carbon atoms, or a mixture thereof, with a melting point of from 45°C to 80°C.

30

Other highly preferred suds suppressing systems comprise polydimethylsiloxane or mixtures of silicone, such as polydimethylsiloxane, aluminosilicate and polycarboxylic polymers, such as copolymers of laic and acrylic acid.

5 Polymeric Dye Transfer Inhibiting Agents

The compositions herein may also comprise from 0.01% to 10 %, preferably from 0.05% to 0.5% by weight of polymeric dye transfer inhibiting agents.

10 The polymeric dye transfer inhibiting agents are preferably selected from polyamine N-oxide polymers, copolymers of N-vinylpyrrolidone and N-vinylimidazole, polyvinylpyrrolidone polymers or combinations thereof, whereby these polymers can be cross-linked polymers.

Optical Brightener

15 The compositions herein also optionally contain from about 0.005% to 5% by weight of certain types of hydrophilic optical brighteners, as known in the art.

Polymeric Soil Release Agent

20 Polymeric soil release agents, hereinafter "SRA", can optionally be employed in the present compositions. If utilized, SRA's will generally comprise from 0.01% to 10.0%, typically from 0.1% to 5%, preferably from 0.2% to 3.0% by weight, of the compositions.

25 Preferred SRA's typically have hydrophilic segments to hydrophilize the surface of hydrophobic fibers such as polyester and nylon, and hydrophobic segments to deposit upon hydrophobic fibers and remain adhered thereto through completion of washing and rinsing cycles, thereby serving as an anchor for the hydrophilic segments. This can enable stains occurring subsequent to treatment with the SRA to be more easily cleaned in later washing procedures.

30 Preferred SRA's include oligomeric terephthalate esters, typically prepared by processes involving at least one transesterification/oligomerization, often with a metal catalyst such

as a titanium(IV) alkoxide. Such esters may be made using additional monomers capable of being incorporated into the ester structure through one, two, three, four or more positions, without, of course, forming a densely crosslinked overall structure.

5 Suitable SRA's include a sulfonated product of a substantially linear ester oligomer comprised of an oligomeric ester backbone of terephthaloyl and oxyalkyleneoxy repeat units and allyl-derived sulfonated terminal moieties covalently attached to the backbone, for example as described in U.S. 4,968,451, November 6, 1990 to J.J. Scheibel and E.P. Gosselink. Such ester oligomers can be prepared by: (a) ethoxylating allyl alcohol; (b)
10 reacting the product of (a) with dimethyl terephthalate ("DMT") and 1,2-propylene glycol ("PG") in a two-stage transesterification/oligomerization procedure; and (c) reacting the product of (b) with sodium metabisulfite in water. Other SRA's include the non-ionic end-capped 1,2-propylene/polyoxyethylene terephthalate polyesters of U.S. 4,711,730, December 8, 1987 to Gosselink et al., for example those produced by
15 transesterification/oligomerization of poly(ethyleneglycol) methyl ether, DMT, PG and poly(ethyleneglycol) ("PEG"). Other examples of SRA's include: the partly- and fully-anionic-end-capped oligomeric esters of U.S. 4,721,580, January 26, 1988 to Gosselink, such as oligomers from ethylene glycol ("EG"), PG, DMT and Na-3,6-dioxa-8-hydroxyoctanesulfonate; the non-ionic-capped block polyester oligomeric compounds of
20 U.S. 4,702,857, October 27, 1987 to Gosselink, for example produced from DMT, methyl (Me)-capped PEG and EG and/or PG, or a combination of DMT, EG and/or PG, Me-capped PEG and Na-dimethyl-5-sulfoisophthalate; and the anionic, especially sulfoaroyl, end-capped terephthalate esters of U.S. 4,877,896, October 31, 1989 to Maldonado, Gosselink et al., the latter being typical of SRA's useful in both laundry and
25 fabric conditioning products, an example being an ester composition made from m-sulfobenzoic acid monosodium salt, PG and DMT, optionally but preferably further comprising added PEG, e.g., PEG 3400.

SRA's also include: simple copolymeric blocks of ethylene terephthalate or propylene
30 terephthalate with polyethylene oxide or polypropylene oxide terephthalate, see U.S. 3,959,230 to Hays, May 25, 1976 and U.S. 3,893,929 to Basadur, July 8, 1975; cellulosic

- derivatives such as the hydroxyether cellulosic polymers available as METHOCEL from Dow; the C₁-C₄ alkyl celluloses and C₄ hydroxyalkyl celluloses, see U.S. 4,000,093, December 28, 1976 to Nicol, et al.; and the methyl cellulose ethers having an average degree of substitution (methyl) per anhydroglucose unit from about 1.6 to about 2.3 and a solution viscosity of from about 80 to about 120 centipoise measured at 20°C as a 2% aqueous solution. Such materials are available as METOLOSE SM100 and METOLOSE SM200, which are the trade names of methyl cellulose ethers manufactured by Shin-etsu Kagaku Kogyo KK.
- 10 Additional classes of SRA's include: (I) non-ionic terephthalates using diisocyanate coupling agents to link polymeric ester structures, see U.S. 4,201,824, Violland et al. and U.S. 4,240,918 Lagasse et al.; and (II) SRA's with carboxylate terminal groups made by adding trimellitic anhydride to known SRA's to convert terminal hydroxyl groups to trimellitate esters. With the proper selection of catalyst, the trimellitic anhydride forms
- 15 linkages to the terminals of the polymer through an ester of the isolated carboxylic acid of trimellitic anhydride rather than by opening of the anhydride linkage. Either non-ionic or anionic SRA's may be used as starting materials as long as they have hydroxyl terminal groups which may be esterified. See U.S. 4,525,524 Tung et al.. Other classes include: (III) anionic terephthalate-based SRA's of the urethane-linked variety, see U.S. 4,201,824,
- 20 Violland et al.;

Other Optional Ingredients

Other optional ingredients suitable for inclusion in the compositions of the invention include perfumes, speckles, colours or dyes, filler salts, with sodium sulphate being a preferred filler salt. Also, minor amounts (e.g., less than about 20% by weight) of neutralizing agents, buffering agents, phase regulants, hydrotropes, enzyme stabilizing agents, polyacids, suds regulants, opacifiers, anti-oxidants, bactericides and dyes, such as those described in US Patent 4,285,841 to Barrat et al., issued August 25, 1981 (herein incorporated by reference), can be present. Highly preferred are encapsulated perfumes, preferably comprising a starch encapsulate.

In the compositions of the invention, it may be preferred that when dyes and/ or perfumes are sprayed onto the another component, the component does not comprise spray-on non-ionic alkoxylated alcohol surfactant.

Form of the Compositions

The composition of the invention thereof can be made via a variety of methods involving the mixing of ingredients, including dry-mixing, compaction such as agglomerating, extrusion, tableting, or spray-drying of the various compounds comprised in the detergent component, or mixtures of these techniques, whereby the components herein also can be made by for example compaction, including extrusion and agglomerating, or spray-drying.

The compositions herein can take a variety of physical solid forms including forms such as tablet, flake, pastille and bar, and preferably the composition is in the form of granules or a tablet.

The compositions in accordance with the present invention can also be used in or in combination with bleach additive compositions, for example comprising chlorine bleach.

The compositions preferably have a density of more than 350 gr/litre, more preferably more than 450 gr/litre or even more than 570 gr/litre.

Below are some examples of detergent compositions according to the invention.

Abbreviations used in Examples

- 5 In the detergent compositions exemplified below, the abbreviated component identifications have the following meanings:

	LAS	:	Sodium linear C ₁₁₋₁₃ alkyl benzene sulfonate
	LAS (I)	:	Flake containing sodium linear C ₁₁₋₁₃ alkyl benzene
10			sulfonate (90%) and sodium sulphate and moisture
	LAS(II)	:	Potassium linear C ₁₁₋₁₃ alkyl benzene sulfonate
	MES	:	α -sulpho methylester of C ₁₈ fatty acid
	TAS	:	Sodium tallow alkyl sulphate
	CxyAS	:	Sodium C _{1x} - C _{1y} alkyl sulphate
15	C46SAS	:	Sodium C ₁₄ - C ₁₆ secondary (2,3) alkyl sulphate
	CxyEzS	:	Sodium C _{1x} -C _{1y} alkyl sulphate condensed with z moles of ethylene oxide
	CxyEz	:	C _{1x} -C _{1y} predominantly linear primary alcohol condensed with an average of z moles of ethylene oxide
20	QAS	:	R ₂ .N ⁺ (CH ₃) ₂ (C ₂ H ₄ OH) with R ₂ = C ₁₂ - C ₁₄
	QAS I	:	R ₂ .N ⁺ (CH ₃) ₂ (C ₂ H ₄ OH) with R ₂ = C ₈ - C ₁₁
	SADS	:	Sodium C ₁₄ -C ₂₂ alkyl disulfate of formula 2-(R).C ₄ H ₇ .-1,4-(SO ₄ -) ₂ where R = C ₁₀ -C ₁₈
	SADE2S	:	Sodium C ₁₄ -C ₂₂ alkyl disulfate of formula 2-(R).C ₄ H ₇ .-1,4-(SO ₄ -) ₂ where R = C ₁₀ -C ₁₈ , condensed with z moles of
25			ethylene oxide
	APA	:	C ₈ - C ₁₀ amido propyl dimethyl amine
	Soap	:	Sodium linear alkyl carboxylate derived from an 80/20 mixture of tallow and coconut fatty acids

	STS	:	Sodium toluene sulphonate
	CFAA	:	C ₁₂ -C ₁₄ (coco) alkyl N-methyl glucamide
	TFAA	:	C ₁₆ -C ₁₈ alkyl N-methyl glucamide
	TPKFA	:	C ₁₆ -C ₁₈ topped whole cut fatty acids
5	STPP	:	Anhydrous sodium tripolyphosphate
	TSPP	:	Tetrasodium pyrophosphate
	Zeolite A	:	Hydrated sodium aluminosilicate of formula Na ₁₂ (AlO ₂ SiO ₂) ₁₂ ·27H ₂ O having a primary particle size in the range from 0.1 to 10 micrometers (weight expressed on an anhydrous basis)
10	NaSKS-6 (I)	:	Crystalline layered silicate of formula δ- Na ₂ Si ₂ O ₅ of weight average particle size of 18 microns and at least 90% by weight being of particle size of below 65.6 microns.
15	NaSKS-6 (II)	:	Crystalline layered silicate of formula δ- Na ₂ Si ₂ O ₅ of weight average particle size of 18 microns and at least 90% by weight being of particle size of below 42.1 microns.
	Citric acid	:	Anhydrous citric acid
	Borate	:	Sodium borate
20	Carbonate	:	Anhydrous sodium carbonate with a particle size between 200μm and 900μm
	Bicarbonate	:	Anhydrous sodium bicarbonate with a particle size distribution between 400μm and 1200μm
	Silicate	:	Amorphous sodium silicate (SiO ₂ :Na ₂ O = 2.0:1)
	Sulphate	:	Anhydrous sodium sulphate
25	Mg sulphate	:	Anhydrous magnesium sulphate
	Citrate	:	Tri-sodium citrate dihydrate of activity 86.4% with a particle size distribution between 425μm and 850μm
	MA/AA	:	Copolymer of 1:4 maleic/acrylic acid, average molecular weight about 70,000

	MA/AA (1)	:	Copolymer of 4:6 maleic/acrylic acid, average molecular weight about 10,000
	AA	:	Sodium polyacrylate polymer of average molecular weight 4,500
5	CMC	:	Sodium carboxymethyl cellulose
	Cellulose ether	:	Methyl cellulose ether with a degree of polymerization of 650 available from Shin Etsu Chemicals
	Protease	:	Proteolytic enzyme, having 3.3% by weight of active enzyme, sold by NOVO Industries A/S under the tradename Savinase
10	Protease I	:	Proteolytic enzyme, having 4% by weight of active enzyme, as described in WO 95/10591, sold by Genencor Int. Inc.
	Alcalase	:	Proteolytic enzyme, having 5.3% by weight of active enzyme, sold by NOVO Industries A/S
15	Cellulase	:	Cellulytic enzyme, having 0.23% by weight of active enzyme, sold by NOVO Industries A/S under the tradename Carezyme
	Amylase	:	Amylolytic enzyme, having 1.6% by weight of active enzyme, sold by NOVO Industries A/S under the tradename Termamyl 120T
20	Amylase II	:	Amylolytic enzyme, as disclosed in PCT/ US9703635
	Lipase	:	Lipolytic enzyme, having 2.0% by weight of active enzyme, sold by NOVO Industries A/S under the tradename Lipolase
25	Lipase (1)	:	Lipolytic enzyme, having 2.0% by weight of active enzyme, sold by NOVO Industries A/S under the tradename Lipolase Ultra
	Endolase	:	Endoglucanase enzyme, having 1.5% by weight of active enzyme, sold by NOVO Industries A/S
30	PB4	:	Sodium perborate tetrahydrate of nominal formula $\text{NaBO}_2 \cdot 3\text{H}_2\text{O} \cdot \text{H}_2\text{O}_2$

	PB1	:	Anhydrous sodium perborate bleach of nominal formula $\text{NaBO}_2 \cdot \text{H}_2\text{O}_2$
	Percarbonate	:	Sodium percarbonate of nominal formula $2\text{Na}_2\text{CO}_3 \cdot 3\text{H}_2\text{O}_2$
5	DOBS	:	Decanoyl oxybenzene sulfonate in the form of the sodium salt
	DPDA	:	Diperoxydodecanedioic acid
	NOBS	:	Nonanoyloxybenzene sulfonate in the form of the sodium salt
10	NACA-OBS	:	(6-nonamidocaproyl) oxybenzene sulfonate
	LOBS	:	Dodecanoyloxybenzene sulfonate in the form of the sodium salt
	DOBS	:	Decanoyloxybenzene sulfonate in the form of the sodium salt
15	DOBA	:	Decanoyl oxybenzoic acid
	TAED	:	Tetraacetythylenediamine
	DTPA	:	Diethylene triamine pentaacetic acid
	DTPMP	:	Diethylene triamine penta (methylene phosphonate), marketed by Monsanto under the Tradename Dequest 2060
20	EDDS	:	Ethylenediamine-N,N'-disuccinic acid, (S,S) isomer in the form of its sodium salt.
	Photoactivated bleach:	:	Sulfonated zinc phthlocyanine encapsulated in or carried by soluble polymer or sulfonated alumino phthlocyanine encapsulated in or carried by soluble polymer
25	Brightener 1	:	Disodium 4,4'-bis(2-sulphostyryl)biphenyl
	Brightener 2	:	Disodium 4,4'-bis(4-anilino-6-morpholino-1.3.5-triazin-2-yl)amino) stilbene-2:2'-disulfonate
	HEDP	:	1,1-hydroxyethane diphosphonic acid
	PEGx	:	Polyethylene glycol, with a molecular weight of x (typically
30			4,000)

	PEO	:	Polyethylene oxide, with an average molecular weight of 50,000
	TEPAE	:	Tetraethylenepentaamine ethoxylate
	PVI	:	Polyvinyl imidosole, with an average molecular weight of 20,000
5	PVP	:	Polyvinylpyrrolidone polymer, with an average molecular weight of 60,000
	PVNO	:	Polyvinylpyridine N-oxide polymer, with an average molecular weight of 50,000
10	PVPVI	:	Copolymer of polyvinylpyrrolidone and vinylimidazole, with an average molecular weight of 20,000
	QEA	:	bis((C ₂ H ₅ O)(C ₂ H ₄ O) _n)(CH ₃) -N ⁺ -C ₆ H ₁₂ -N ⁺ -(CH ₃) bis((C ₂ H ₅ O)-(C ₂ H ₄ O)) _n , wherein n = from 20 to 30
	SRP 1	:	Anionically end capped poly esters
15	SRP 2	:	Diethoxylated poly (1, 2 propylene terephtalate) short block polymer
	PEI	:	Polyethyleneimine with an average molecular weight of 1800 and an average ethoxylation degree of 7 ethyleneoxy residues per nitrogen
20	Silicone antifoam	:	Polydimethylsiloxane foam controller with siloxane-oxyalkylene copolymer as dispersing agent with a ratio of said foam controller to said dispersing agent of 10:1 to 100:1
	Opacifier	:	Water based monostyrene latex mixture, sold by BASF
25		:	Aktiengesellschaft under the tradename Lytron 621
	Wax	:	Paraffin wax

Example 1

A detergent composition was formed comprising blown powder, an agglomerate comprising crystalline layered silicate and anionic surfactant, an effervescent particle and dry-mixed bleach activator particle, sodium percarbonate, sodium citrate and suds
5 supressor.

The individual particulates were prepared and dry-mixed together with gentle mixing e.g. in a Nautamixer for a period of at least 4 minutes.

Preparation of the Blown Powder

The composition of the final blown powder was as follows:-

5

<u>Ingredient</u>	<u>% in Blown Powder</u>
Sodium Linear Alkylbenzene Sulphonate (LAS) (av. Carbon chain length 11.8)	24
Copolymer of Acrylic/Maleic Acid	5
10 Polyethylene glycol (MW=4000)	2
Sodium Sulphate	15
Sodium Carbonate	23
Sodium Citrate	23
Water	8

15

The blown powder was prepared by a standard spray drying process. The above ingredients were mixed into a slurry with water. The aqueous slurry may be prepared by a batch or continuous process. In this case, a batch mixer, or "crutcher" was used in which the various detergent components were dissolved in, or slurried with, water to provide a slurry containing 35% water. The water content may be varied from about 20% to about 20
60% by weight of water, preferably it is about from about 30% to about 40% by weight water. In this example the order of addition of the ingredients to water to form the aqueous slurry was as listed above in the final composition of the blown powder. The aqueous slurry was then pumped at high pressure through atomising nozzles into a spray-
25 drying tower where excess water was driven off, producing a flowable powder product (blown powder). Fines were screened out through a mesh.

Preparation of Crystalline layered silicate/Anionic Surfactant Particle

An agglomerate comprising 70% SKS6 and 30% LAS was prepared by a conventional
30 agglomeration process.

Preparation of the Effervescent Particle

Particles were prepared having the following composition:

5

<u>Ingredient</u>	<u>Composition %</u>
Malic Acid	44
Sodium Bicarbonate	40
Sodium Carbonate	16

10

The particle was made via a roller compaction process. The raw materials in the proportions indicated above, were fed at a press force of 80kN into a Pharmapaktor L200/50 P roller, set up with concave smooth rolls with a 0.3mm axial corrugation installed. The flakes produced were then compacted using a Flake Crusher FC 200 with a

15 mesh size selected to produce the required particle size. The product was screened to remove the fines. These three components were mixed with the additional dry-added ingredients listed below, in the proportions given below, to form a detergent composition according to the invention.

20	<u>Ingredient</u>	<u>% in Detergent Composition</u>
	Spray Dried	60
	Bleach Activator	4
	Sodium Percarbonate	2
	Sodium Citrate	5
25	Sodium sesquicarbonate ($\text{Na}_3\text{H}(\text{CO}_3)_2 \cdot 2\text{H}_2\text{O}$)	9
	SKS6/LAS granulate	10
	Suds supressor particle (95% PEG, 5% silicone)	0.3
30	Effervescent Particle	9.7

Example 2

Further examples of detergent compositions of the invention are given as formulations A-D in the table below which also indicates the method of preparation of the examples.

5

	A	B	C	D
<u>Blown powder</u>				
LAS II (KLAS)	5.0	5.0	-	-
LAS	-	-	5.0	8.0
TAS	-	-	-	-
MBAS	-	-	-	-
C ₄₅ AS	-	-	-	-
C ₄₅ AE ₃ S	-	1.0	-	1.0
QAS	-	-		
DTPA, HEDP and/or EDDS	0.8	0.7	0.8	1.0
MgSO ₄	-	-	-	-
Sodium citrate	10.0	12.0	-	-
Sodium carbonate	10.0	9.0	5.0	10.0
Sodium sulphate	-	-	1.0	3.0
Sodium silicate 1.6R	-	-	-	-
Zeolite A	-	-	16.0	18.0
SKS-6	-	-	-	-
MA/AA or AA	1.0	2.0	1.0	2.0
PEG 4000	-	1.0	-	1.0
QEA	1.0	-	1.0	-
Brightener	0.05	0.05	0.05	0.05
Silicone oil	0.01	0.01	0.01	0.01

<u>Agglomerates</u>				
SKS-6	6.0	5.0	6.0	6.0
LAS	4.0	5.0	4.0	3.0
<u>Dry-add particulate components</u>				
Maleic acid/ carbonate/bicarbonate (40:20:40)	8.0	10.0	8.0	10.0
QEA	-	-	-	-
NACAOBS	3.0	-	3.0	-
NOBS	-	3.0	-	3.0
TAED	2.5	-	2.5	-
MBAS	-	-	-	-
LAS (I)	10.0	8.0	10.0	5.0
Sodium sesquicarbonate	10.0	5.0	-	10.0
Sodium bicarbonate	-	-	9.0	-
<u>Spray-on</u>				
Brightener	0.2	0.2	0.2	0.2
Dye	-	-	-	-
C24AE5	-	-	-	-
Perfume	-	-	-	-
<u>Dry-add</u>				
Citrate	4.0	-	-	4.0
Percarbonate	15.0	3.0	15.0	3.0
Perborate	-	-	-	-
Photobleach	0.02	0.02	0.02	0.02

Enzymes (cellulase, amylase, protease, lipase)	1.5	0.3	1.3	0.3
Carbonate	-	-	0.0	5.0
Perfume (encapsulated)	0.6	0.5	0.6	0.5
Suds supressor	1.0	0.6	1.0	0.6
Soap	0.5	0.2	0.5	-
Citric acid	-	-	-	-
Dyed carbonate (blue, green)	0.5	0.5	0.5	0.5
SKS-6	-	-	-	-
Fillers up to 100%				

Claims

1. A solid detergent composition comprising from 8 to 60 wt % of a surfactant
5 system and having a Grand Compatibility Index of at least 0.5.
2. A detergent composition according to claim 1 having a Grand Compatibility Index
of at least 0.6.
- 10 3. A detergent composition according to claim 2 having a Grand Compatibility Index
of at least 0.8.
4. A detergent composition according to any preceding claim comprising less
than 3 wt % inorganic phosphate salt.
15
5. A detergent composition according to any preceding claim comprising less than 5
wt % inorganic borate salts.
6. A detergent composition according to any preceding claim comprising less than 10
20 wt % inorganic chloride salts.
7. A detergent composition according to any preceding claim comprising enzymes.
8. Use of a detergent composition according to any preceding claim in a washing
25 process for soiled laundry.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/21022

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 C11D17/00 C11D17/06		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 C11D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 307 695 A (UNILEVER PLC) 4 June 1997 see abstract; example 2 ---	1,4-8
X	EP 0 365 103 A (COLGATE PALMOLIVE CO) 25 April 1990 see claim 1; example 2 ---	1,4-8
X	WO 94 22993 A (HENKEL KGAA) 13 October 1994 see claim 1; table 4 ---	1,4-8
X	WO 94 16046 A (QUEST INTERNATIONAL B.V.) 21 July 1994 see example 1; table 1 -----	1,4-8
<input type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center;">4 June 1999</div>	Date of mailing of the international search report <div style="text-align: center;">21 05 1999</div>	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer <div style="text-align: center;">Saunders, T</div>	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 98/21022

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 1 (in part), 2, 3
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/SA/ 210

Claims Nos.: 1 (in part), 2, 3

The term "Grand Compatibility Index" (cf. Claims 1-3) is not a standard parameter used in the field of detergents and the method of calculating this parameter as provided in the description (cf. page 2, line 28 to page 5, line 25) is so complicated as to make it extremely difficult to determine the matter for which protection has been sought (Article 6 PCT), therefore a meaningful search for Claims 1-3 is not possible.

Since the two examples do not provide any further assistance in the arrival at a reasonable conclusion as to the scope of the claimed invention, the only basis for a meaningful search (Article 17(2)(b) PCT) is constituted by Claim 1 in part and Claims 4-8 in full.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/21022

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2307695	A	04-06-1997	NONE	
EP 0365103	A	25-04-1990	AU 628394 B	17-09-1992
			AU 4254989 A	26-04-1990
			DK 502589 A	22-04-1990
			GR 89100672 A,B	29-11-1990
			JP 2196900 A	03-08-1990
			JP 2757967 B	25-05-1998
			MX 170217 B	11-08-1993
			TR 25108 A	01-11-1992
WO 9422993	A	13-10-1994	DE 4310671 A	06-10-1994
			JP 8508053 T	27-08-1996
WO 9416046	A	21-07-1994	AU 5858694 A	15-08-1994
			BR 9307810 A	14-11-1995
			CZ 9501781 A	13-03-1996
			EP 0678118 A	25-10-1995
			JP 8509996 T	22-10-1996
			PL 309786 A	13-11-1995
			SK 87795 A	03-04-1996
			US 5840668 A	24-11-1998